


RMT

Electro-Mechanical Room Thermostat



Versions are also available with built-in thermometer and night set-back function. Please refer to tables below for technical specifications and ordering codes.

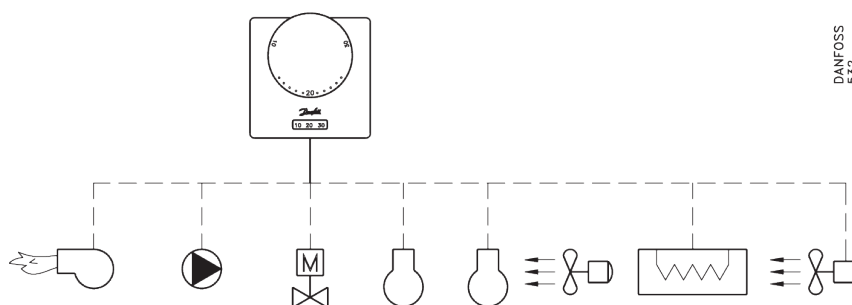

	RMT-24	RMT-230
Temperature Range °C	8 - 30	8 - 30
Storage Temperature Range	-20 - +50	-20 - +50
Operating Temperature Range	-10 - +50	-10 - +50
Contact Type	SPDT	SPDT
Contact Material	Ag	Ag
Contact Rating, Ohmic A a.c.	10	10
Contact Rating, Inductive cos φ = 0.6A a.c.	4	4
Contact Rating, Start Current A a.c.	24	24
Contact Rating, Ohmic A d.c.	1	
Contact Rating, Minimum mA a.c./mA d.c.	70	150
Thermal Deviation °K	< 2.5	< 2.5
Cut in Stability °K	< 0.5	< 0.5
Time Constant (Vair = 0.15m/sec) min	< 14	< 14
Thermal Differential °K (with accelerator)	< 1.0	< 1.0
Storage Temperature Range	-20 - +50	-20 - +50
Working Temperature Range	-10 - +50	-10 - +50
Air Humidity % RH	40-60	40-60
Weight g	150	150
Protection Class	IP 20	IP 20
Ball Pressure Test	75°C	75°C
Control Action Type	1B	1B
Minimum Contact Load	70ma	70ma

Data Sheet






Room Thermostat RMT

Ordering

Type	Order Code	Description	Accelerator	Thermometer	Night Setback
RMT-230	087N1100	230 V a.c.	Parallel	No	No
RMT-230 ¹	087N1110	230 V a.c.	No	No	No
RMT-230T	087N1125	230 V a.c.	Parallel	Yes	Yes
RMT-24	087N1196	24 V a.c.	Parallel	No	No
RMT-24T	087N1197	24 V a.c.	Parallel	Yes	Yes
	087N0099	Adaptor plate for flush mounting			

1) No accelerator heater 2) Only to be used with actuator ABN-NO

Electrical Connection

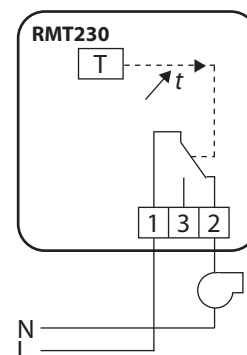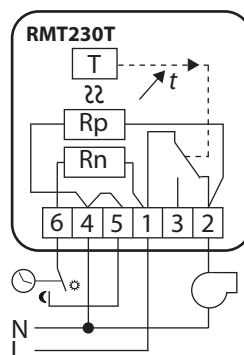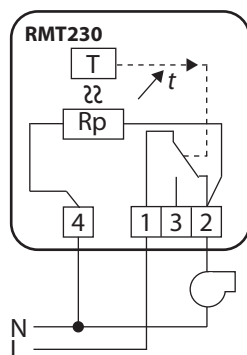


1 - 2 opens on increase in temperature
1 - 3 closes on increase in temperature

24V

24V

Dimensions

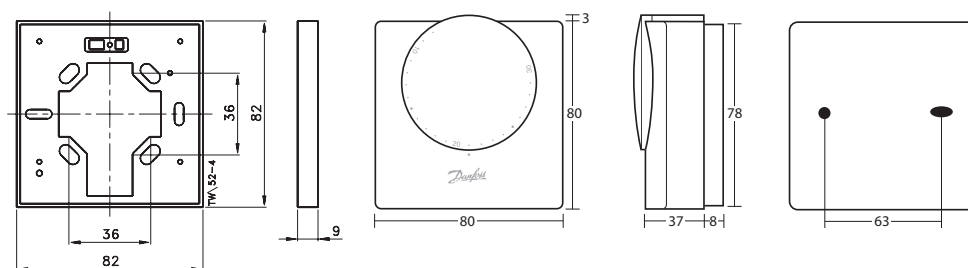

Danfoss A/S

Climate Solutions • danfoss.com • +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product.

All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.