

Product

40015CP - Intamix Thermostatic Mixing Valve 15mm

40022CP - Intamix Thermostatic Mixing Valve 22mm

Technical Specification

Max Inlet Pressure (static):	10 Bar
Min Inlet Pressure (dynamic):	0.2 Bar
Max Inlet Temperature:	85°C
Temperature Adjustment Range:	30°C to 50°C
Temperature Stability:	+/-2°C
Max Pressure Differential:	5:1
Min Temperature Differential Between Hot Inlet & Mixed Outlet to Achieve Cold Water Failsafe:	10°C



Additional Information

One valve to suit all applications

One piece cartridge for ease of maintenance and replacement

High flow rates with low pressure drops

TMV3 approved & complies with HTM04-01 DO8


TMV2 approved & complies with BSEN1111 & BSEN1287:2017

Complies with building regulations Part G

WRAS approved

Integral check valves & strainers

Supplied with 2x EPDM Rubber sealing washers to ensure a water tight seal.
(3/4" Washers supplied with 40015CP,
1" Washers supplied with 40022CP)

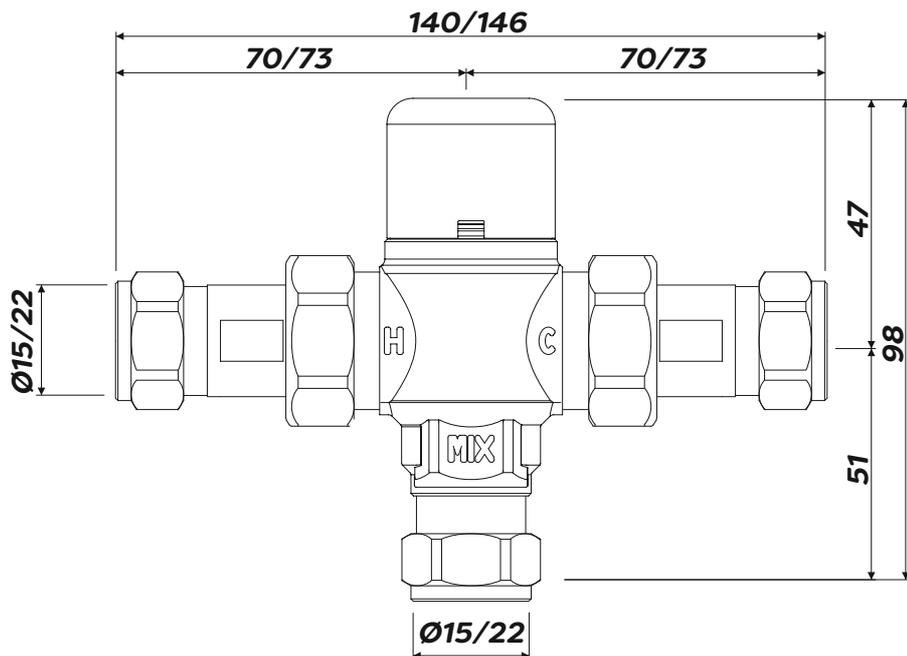

Scan for Installation
& Maintenance
Instructions

Intatec, Airfield Industrial Estate, Hixon, Stafford, ST18 0PF

T. 01889 272180 F. 01889 272181 E. sales@intatec.co.uk

www.intatec.co.uk

07/22
E&OE