


GC Universal Modern 15-70 - Energy Efficient Pump Head

Specification

Part Number: GCM15
 Maximum Head: 6 Metres
 Maximum Flow Rate: 65 Litres Per Minute
 Maximum System Pressure: 10 Bar
 Speed Control: 6 Modes
 Energy Efficiency Index (EEI): ≤ 0.20
 CE/UKCA Approved: Yes
 Protection Class: IP44
 Temperature Class: TF95°C
 Insulation Class: F
 Supplied With: Rubber Washers x2
 Material: Cast Iron
 Barcode: 5065015167099
 Commodity Code: 8413703000
 Colour: Royal Blue
 Weight: 1.4kg

ARCHERGAS®

ENGINEERING DURABILITY

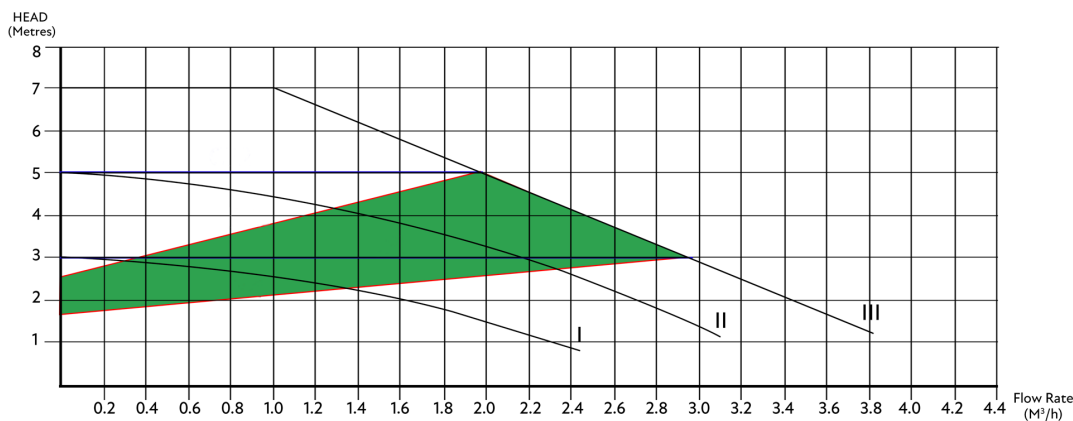

8716120409	0010030632	20192664	7722642	177925	7826458	1.038162	65119656-01	1000-0301485	0020186159
8716120411	0020231141	(6025)	7713520	182357	7876450	1.038161	60079225		
8716120416	0010030634	20185332	7808435	182455					
8716120459	0020221617	20104311	7855245						
8716120415	0020231142	20194913	7724945						
8737710972	0010030636	20106868	7220533						
8716120472	0020213118	20199317							
8737604215	0020221616								

*To search using GC numbers or boiler model names download the Archergas® app on iOS or Android

*Also fits UPS3/UPM3/UPM4 standalone pumps & can replace the ALPHA2 GO

*The benchmark for the most efficient circulators is $EEI \leq 0.20$

*GCM15® is a registered trademark owned by Archergas Limited

*This pump head is for standalone head changes and use inside boilers



www.archergas.com