


Light Commercial Standard 25-80/180 – Energy Efficient Heating Circulator

Specification

Part Number: LIGHT25
Connection Size: 1 1/2"
Port to Port Distance: 180mm
Maximum Head: 8 Metres
Maximum Flow Rate: 86 Litres Per Minute
Maximum System Pressure: 10 Bar
Energy Efficiency Index (EEI): ≤ 0.21
CE/UKCA Approved: Yes
Speed Control: 3 Speed + ECO
Protection Class: IP44
Temperature Class: TF95°C
Insulation Class: F
Supplied With: Rubber Washers x2
Material: Cast Iron
Barcode: 5070000518725
Commodity Code: 8413703000
Colour: Jet Black
Weight: 2.3kg

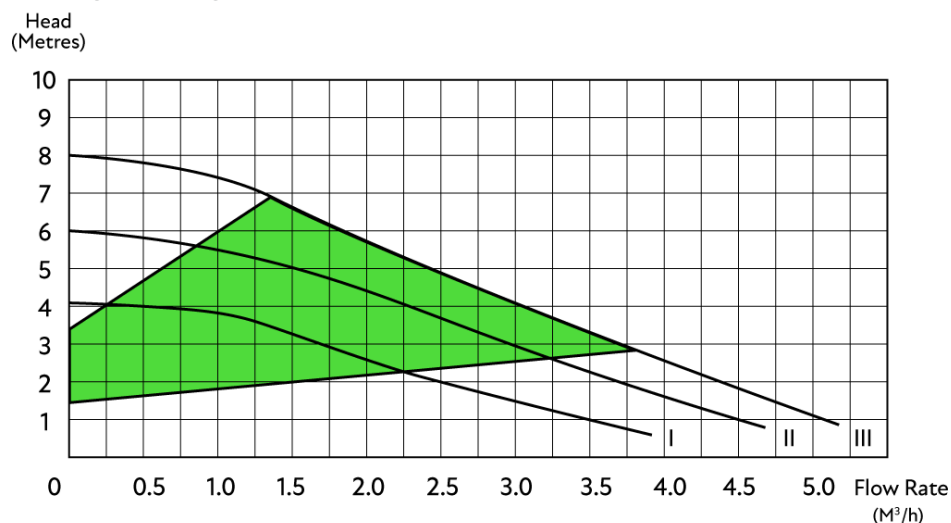



*The benchmark for the most efficient circulators is $EEI \leq 0.20$

*LIGHT25® is a registered trademark owned by Archergas Limited

*This standalone circulator is not for head changes or use inside boilers

ARCHERGAS®

ENGINEERING DURABILITY

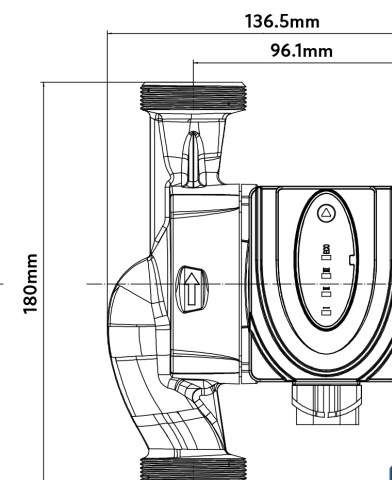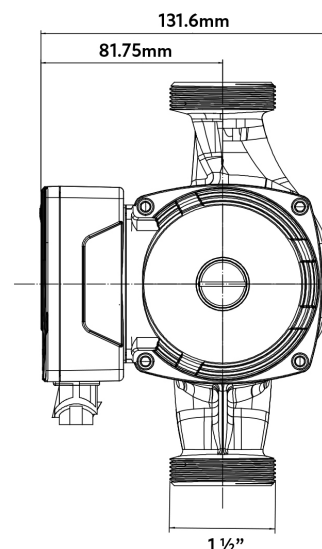

3007255



676108

www.archergas.com