




For the Homeowner
December 2011 Edition



The heart of every bathroom.

www.tritonshowers.com

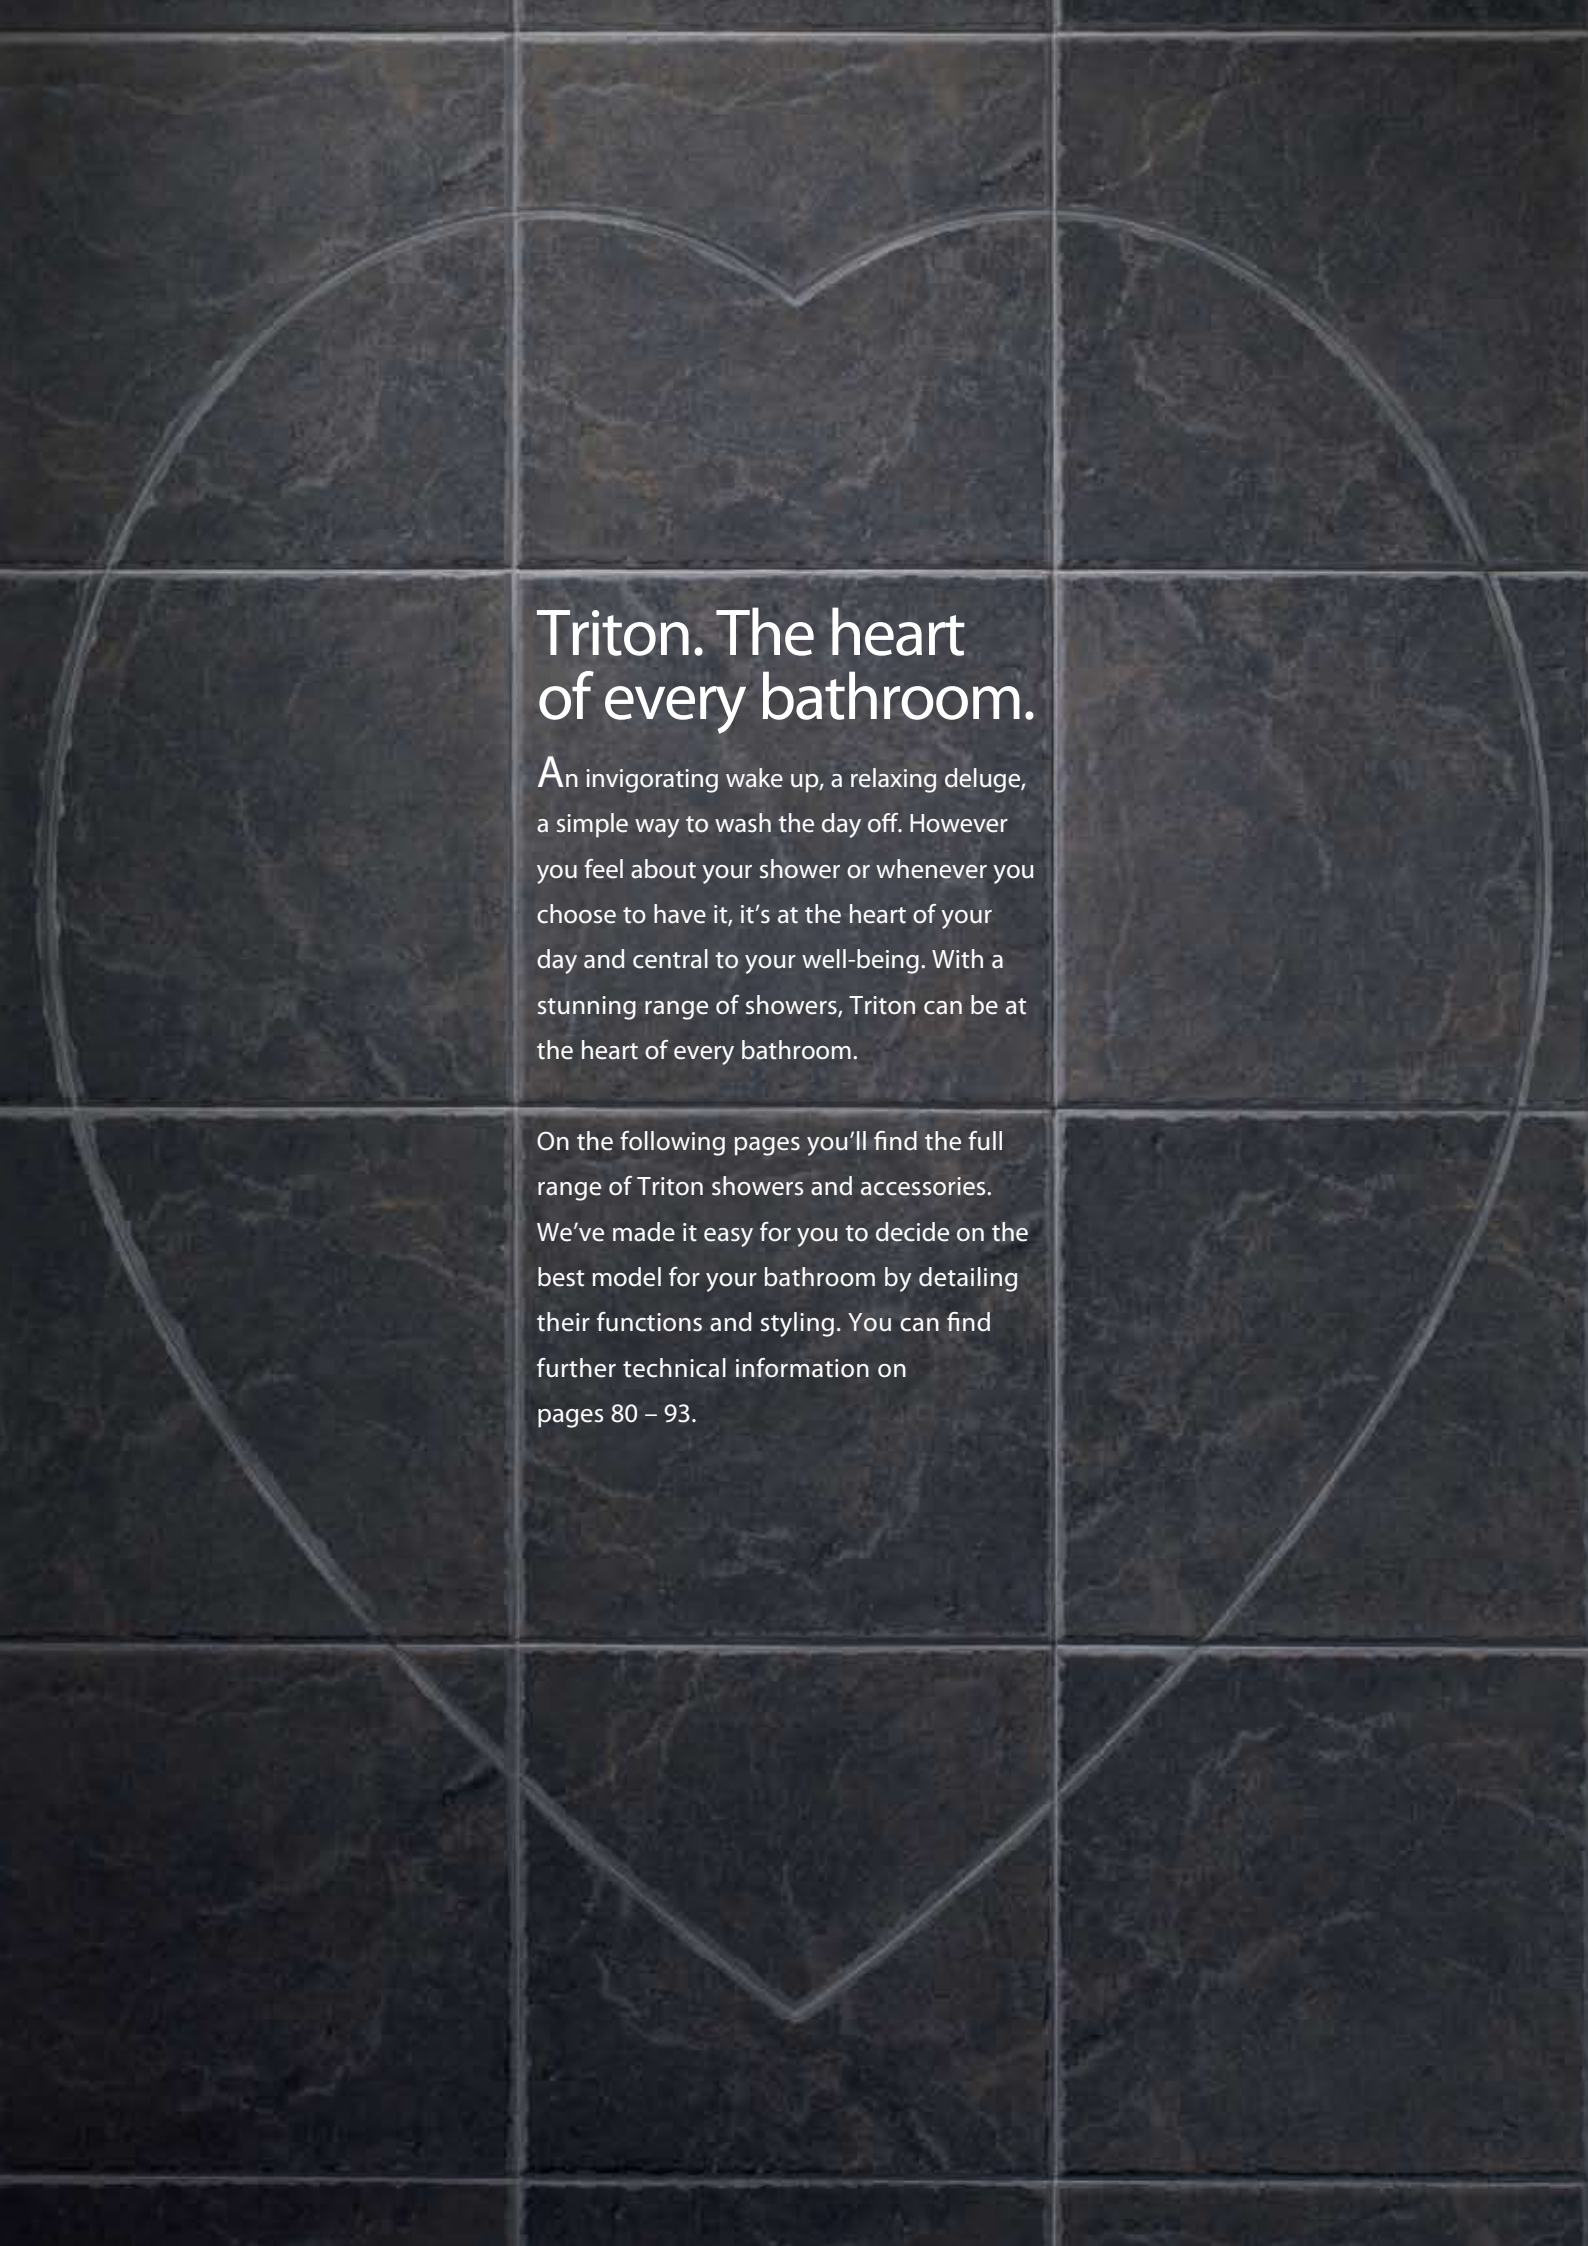

Triton. The heart of every bathroom.

An invigorating wake up, a relaxing deluge, a simple way to wash the day off. However you feel about your shower or whenever you choose to have it, it's at the heart of your day and central to your well-being. With a stunning range of showers, Triton can be at the heart of every bathroom.

On the following pages you'll find the full range of Triton showers and accessories. We've made it easy for you to decide on the best model for your bathroom by detailing their functions and styling. You can find further technical information on pages 80 – 93.

Contents

| | |
|-----------------------------------|----|
| Give your bathroom a Triton | 4 |
| What system do you have? | 6 |
| The Triton shower range explained | 9 |
| Digital showers | 10 |
| Electric showers | 18 |
| Care products | 36 |
| Mixer showers | 38 |
| Power showers | 64 |
| Eco showers | 68 |
| Bathroom accessories | 71 |
| Pumps | 72 |
| Shower accessories | 73 |
| Technical details | 80 |



Love your bathroom, give it a heart, give it a Triton.

Triton have been at the heart of Britain's bathrooms for more than 30 years. And there's a simple reason why we've stayed in the affections of the British family home for so long; we care.

We care about making a quality product that lasts for life. So all of our models are expertly engineered and rigorously tested 50,000 times. We also care about design, making stylish fittings affordable for everyone. And we care about our customers, after all, we wouldn't have got very far without them.

Whatever type of shower you choose, whatever style you want, every shower we make looks beautiful and works beautifully. That's because not only are all our models individually tested but they are each backed by a Triton guarantee covering against all mechanical and electrical defects from the day you buy it.



The heart of every bathroom.



5 year guarantee: Selected mixer showers are guaranteed for 5 years for domestic use.



3 year guarantee: 3 year mixer guarantees with the option to extend to 5 years.



2 year guarantee: Electric showers are all guaranteed for 2 years for domestic use, with the option to extend to 5 years.



1 year guarantee: All power showers, shower towers and pumps are guaranteed for 1 year for domestic use, with the option to extend to 5 years.



Quality approvals:

- Triton showers have achieved ISO 9001 accreditation for their safety and quality
- All power showers comply with BEAB safety standards
- All electric showers comply with BEAB, CE and BSI Kitemark approvals
- WRAS approved on selected Electric and Mixer products.



Unbeatable range: Our extensive range of showers offer incredible style and function at affordable prices. We also design and manufacture a comprehensive range of bathroom fittings and accessories to complete the look.



Outstanding customer service: Our dedicated team of over 40 Customer Service Operators are there to help if you need further information on how to choose, install or maintain your Triton shower. In the unlikely event of a fault occurring with your shower, we have a nationwide network of Service Engineers ready to help.




Environmentally friendly: With a reputation built on trust it's only fitting we should also look to the future. Our range of environmentally friendly showers reduce water consumption, not performance and we conform to EMS ISO 14001 which includes internal material recycling policies and environmental initiatives. We are looking at ways in which renewable energy can save money and minimise any negative impact on the environment. We are committed to the future with eco showers adhering to the Code for Sustainable Housing, making responsible choices easy for everyone.



Wireless: Our team of designers strive to keep Triton at the forefront of technology and consistently listen to our installers' and customers' needs. For example, our digital range of showers are available with wireless technology to offer more design freedom.


What sort of system do you have?

One of the first questions you need to ask when you're choosing a new shower is "Do I have a high or a low pressure water system?" because this will determine the type of shower unit that is suitable and offers the best performance. It's also worth noting that electric showers are suitable for use with any plumbing system because they heat water instantly from the cold mains or in some cases a cold water cistern.

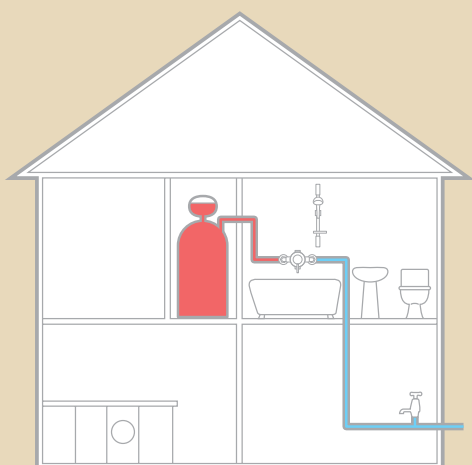

High pressure water systems

If you have a hot water tank (cylinder), usually found in your airing cupboard, but you don't have a cold water tank (cistern) in your loft, this is an unvented high pressure system. This can look similar to a low pressure system so check carefully to avoid confusion. Also take caution in refurbished houses with disused water tanks.

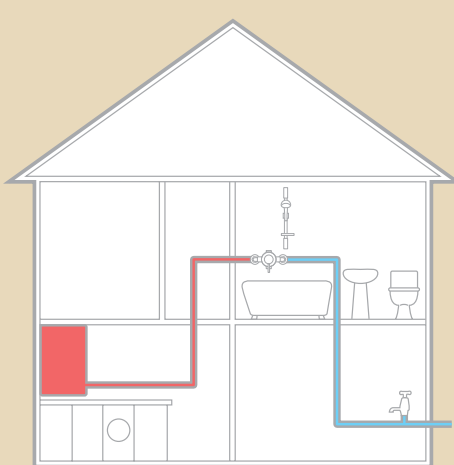

If you have a Combination (Combi) boiler which heats water on demand so there is no hot water storage cylinder or cold water tank, you have a high pressure system.

If you have either of these two set-ups, simply choose from our extensive range of High Pressure showers indicated by the relevant symbol illustrated above (H or A).

Temperature control explained



You'll notice some of our showers are described as Temperature Stabilised and some as Thermostatic. This refers to their method of temperature control.

Temperature Stabilised

Electric showers stabilise the water temperature when fluctuations occur in your water supply, for example when someone flushes a toilet or the washing machine is running.

Thermostatic

Electric, Mixer and Power showers actively regulate the water temperature when fluctuations occur in your water supply or inlet temperatures. They offer you more precise control and greater safety.

The shower symbols explained

Look for the following symbols on our showers



Showers that are suitable for both High and Low pressure systems.



Showers that are suitable for High pressure systems.



Thermostatic temperature control




Showers that are suitable for Cold Mains systems.



Showers that are suitable for Low pressure systems.



Showers that are suitable for Low pressure systems when used with a pump.

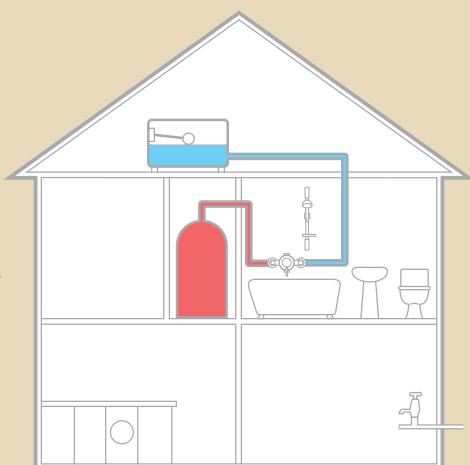

Low pressure water systems

If you have a cold water tank (cistern) in your loft and a hot water tank (cylinder) in your airing cupboard, this is a gravity-fed system. It's the most common household plumbing system and means you have a low pressure water system.


Having low pressure need not limit your choice of shower type. Simply choose from our extensive range of Low Pressure suitable showers indicated by the relevant symbol illustrated above (L or A).

If your hot water cylinder is large enough and you want a more powerful shower, it is possible to boost your system with a pump (see page 72 for details).



Low pressure water systems when used with a pump

As low pressure water systems above, but only suitable if used with a pump indicated by the relevant symbol illustrated above (P). Refer to page 83 for pump installation.

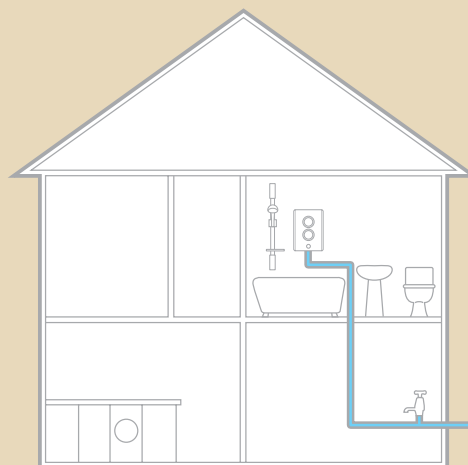

Cold mains

Most Electric showers can be connected to a cold water mains supply, simply choose from our extensive range of Electric showers indicated by the relevant symbol illustrated above (C).


If your cold mains does not have the required regulated minimum pressure, select the T150Z pumped, T90XR pumped or Safeguard pumped electric showers or choose the T450i separate booster pump to feed from a cold water tank (cistern) in your loft (see pages 20, 35, 36 and 72 for product details).

See www.tritonshowers.co.uk
for more information.

VISIT. CONNECT. CONVERSE with Triton



Join in the conversation with Triton on our Twitter page. Exchange with quick, frequent answers to address one simple question 'what's happening'? Join today and start receiving Triton shower Tweets on twitter.com/tritonshowers

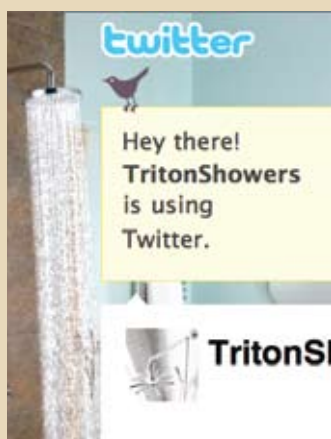

Triton's Website Features:

- Help me choose - To help you determine the ideal shower to match your water system.
- Triton products- Browse though our large selection showers available.
- Triton Brochure - View or download the latest Triton brochure.
- Where to Buy - Locate your nearest Stockist.
- After sales service - Register your extended warranty details, search our frequently asked questions or book a service engineer visit.
- 3D showcase- Click on our 3D showcase and view the latest products in 3D, Spin them around or zoom in for a closer look.

For this and more visit us on www.tritonshowers.co.uk



Become a fan of the Triton facebook page for regular updates. Up and coming competitions will offer the chance to win the latest hi-tech gadgets such as iPads and iPhones. Access upfront news of Triton's product launches and useful tips on showering. To share news , information and offers visit www.facebook.com/triton.installer



Visit Triton on YouTube for helpful and informative videos explaining more about Triton showers, their design features and modes of operation as well as product related installation videos detailing 'step by step' and 'how to fit guides'. Alternatively find Triton product videos on the Triton website www.tritonshowers.co.uk/product-videos.asp



Triton Clearance Shop on Ebay features products that are end of line and now on sale.

<http://stores.ebay.co.uk/triton-showers-taps-and-accessories>



Download the FREE Triton Iphone App *Water Warrior!* A game for you to play in your spare time. Your water jug is full, negotiate the obstacles around the course, careful not to spill any on your way! Great fun and designed by Triton with you in mind...

The Triton shower range explained

Digital Showers

Pages 10 to 17.

Triton Digital showers offer an unbeatable combination of state of the art technology, stylish choices, freedom and ease of installation. They offer you a simple and innovative new way to fit and enjoy Britain's best loved shower.

- Shower controlled by a panel that communicates with the shower's power unit to adjust flow and temperature
- Power unit is usually installed in a loft or airing cupboard
- Hot water delivered through either the ceiling or wall, depending on installation
- The control panel can be located within a 10m radius giving you more freedom in your bathroom layout
- No unsightly plumbing on show
- Digital showers are available in either Mixer or Electric variations

The wireless models offer more design freedom, whilst the remote range is connected to the control unit by a completely hidden wire.



Electric Showers

Pages 18 to 35.

Electric showers draw on a cold water supply and heat the water on demand.

- Cold water is heated by an element providing hot water instantly
- Quick and easy to install
- Extremely economic (99.7% energy efficient) with no hot water wastage
- Choose a higher kilowatt rating for better flow performance
- Choose from a wide range of styles and finishes including white/chrome, satin/chrome, chrome, black gloss, gun metal and brushed steel.



Care Range

Pages 36 to 37.

A range of innovative showers that deliver independent living solutions.

- Available in electric, mixer or pumped showers offering a solution for most plumbing systems
- Specifically designed showers with easy to use features for independent safe showering
- A selection of products that are RNIB, BEAB CARE or TMV endorsed for extra safety assurance



Mixer Showers

Pages 38 to 63.

Mixer showers draw from both hot and cold water supplies and usually deliver higher flow rates.

- Ideal for homes with readily available hot water supplied by a combi boiler or large capacity hot water cylinder
- Hot and cold water is mixed within the unit and the water delivered through the shower
- Shower options include fixed head, adjustable head, and handset on a riser rail
- Mixers with a diverter give the option for multiple outlets from the shower unit



Power Showers

Pages 64 to 66.

Power showers draw from both hot and cold water supplies and include an integrated pump to boost the flow rate.

- Only suitable for low pressure systems but deliver a high flow rate showering solution
- Hot and cold water is mixed within the unit and the water is delivered through the shower



Eco Showers

Pages 68 to 70.

A range of showers with a focus on water efficiency.

- Available in electric or mixer variations
- Offer up to a 50% reduction in water usage when compared to conventional mixer showers
- Meets the needs of the Code for Sustainable Housing



Accessories

Pages 71 to 79.

A comprehensive range of accessories from commercial fittings, showerheads, kits, bar brackets and taps to toilet roll holders and bathroom cabinets.



So what is a QR code?

All you have to do is search for your free scanner app on your SMART phone and download the app. Point your camera at your QR code. The app scanner will recognise what kind of code it's looking at and provide you with the option to open the link - which will automatically take you to the linked video where you will watch our feature video.



Digital Showers.

The Digital range incorporates an exciting new development in shower technology, with a choice of either wireless or remote shower solutions. Designed to give you more freedom in the layout and set-up of your bathroom these systems hide the power unit out of sight. The shower is operated by a separate control panel, which is either connected by a hidden wire to the power unit or works via wireless technology. Available in Mixer or Electric models, whichever you decide on, a digital shower will lend your bathroom a sleek and simple elegance.

Satellites Video



Scan the QR code with an app on your smartphone to be taken to the featured video - For more information see Page 9

Satellites

wireless thermostatic
mixer shower

Metis

This understated and neat riser rail with 5 position showerhead can either be used for loft or cupboard installations.



Sirona
Control panel
Code: SATMIXSIR-HP
SATMIXSIR-LP

Satellites Video



Scan the QR code with an app on your
smartphone to be taken to the featured video -
For more information see Page 9

Metis
Code: KITSATMET





Scan the QR code with an app on your smartphone to be taken to the featured video - For more information see Page 9

Three steps to the Satellites range

1. Choose your mixer unit

There are 2 types of mixer unit for the Satellites system; High Pressure or Low Pressure. Choose the unit that suits your water system. If you don't know whether you have high or low pressure see pages 6 and 7 for full information.




SATMIXSIR-HP


SATMIXSIR-LP

2. Choose your installation

Depending on the layout of your home and existing plumbing, a Satellites system can be installed in two ways. A typical loft installation will require a shower kit with a through the ceiling riser rail connecting to the mixer. A typical airing cupboard installation requires a shower kit, that connects the outlet hose to the shower hose through the wall, with a bulkhead.

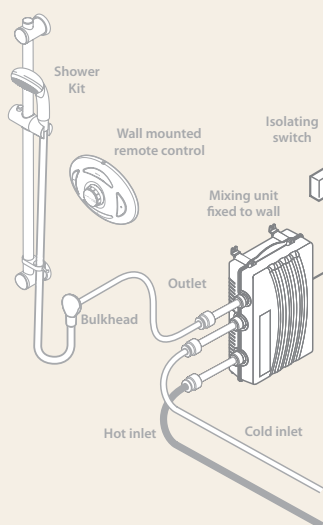

Typical airing cupboard installation

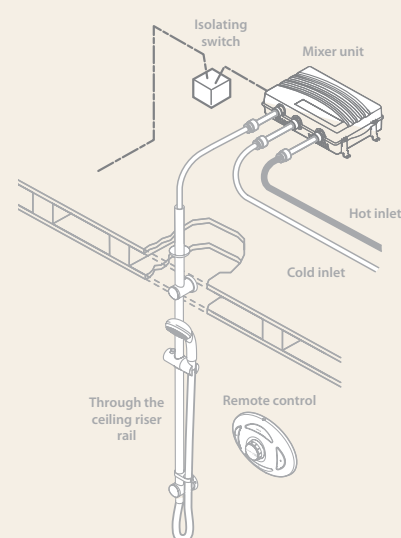


Typical loft installation

3. Choose your shower kit

Choose from 5 riser and handset options: Mellena, Bellona, Metis and Carlova, or the large, fixed head Cyrene to complement the Sirona control panel.


Cyrene
Fixed head
Code:
KITSATCYR



Carlova
Code:
KITSATCAR



Metis
Code:
KITSATMET

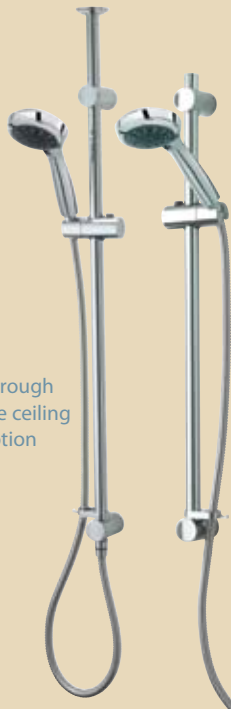

Bellona
Code:
KITSATBEL



Mellena
Code:
KITSATMEL



Sirona
Control panel
Code: SATMIXSIR-HP
SATMIXSIR-LP



Through
the ceiling
option

Through
the wall
option

Through
the ceiling
option

Through
the wall
option

Satellites

wireless thermostatic mixer shower

Mellena

This combines a riser rail, handset and fixed shower head in one solid contemporary and stylish kit. A diverter control allows you to switch between fixed head and handset or a mixture of both. Suitable for loft installations only.



Satellites Video



Scan the QR code with an app on your smartphone to be taken to the featured video - For more information see Page 9



Sirona
Control panel
Code: SATMIXSIR-HP
SATMIXSIR-LP



Mellena
Code: KITSATMEL

Design freedom – position the remote control anywhere within 10 metres of the power unit

Extensive choice – pick any kit that can be installed traditionally or through the ceiling

Thermostatic control – constantly regulated temperature gives you more precise control and safer showering

Warm-up setting – starts the shower and then stops the water flow once it reaches your chosen temperature to let you know it's ready to use

Automatic shutdown – should either the hot or cold water supplies fail

Adjustable Timed Shutdown – set the shower to automatically shutdown after a pre-selected time

Adjustable maximum temperature stop – reduces the risk of accidentally turning the temperature too high

Flow Control – enjoy a powerful flow of water or switch the 'economy' button on to reduce the flow and water consumption

Stylish contemporary designs – easy to use and easy to clean

Fixed showerhead – Single spray pattern

Single spray pattern handset



Satellites

wireless thermostatic
mixer showers

Bellona

This sleek riser rail and handset incorporates 3 multi-spray body jets in a sleek and minimal design. Position the shower head in either the overhead position for a forceful downpour or lower for a softer shower experience. Suitable for loft installations only.

Carlova

This elegantly curved riser rail and chrome handset can either be used for loft or cupboard installations.

Cyrene

This large, ceiling fitted, fixed chrome showerhead makes a stylish and bold statement in any bathroom. The Cyrene can be fitted as close to the ceiling as you like or up to 485mm below it, simply cut the pipe to the required length. Suitable for loft installations only.



Bellona
Rub clean showerhead
- 3 spray pattern

Rub clean body jets
- 2 spray pattern

Carlova
Rub clean showerhead
- 5 spray pattern

Cyrene
Adjustable fixed head
- Single spray pattern



Bellona
Code: **KITSATBEL**

Sirona
Control panel
Code: **SATMIXSIR-HP**
SATMIXSIR-LP



Satellites Video



Scan the QR code with an app on your smartphone to be taken to the featured video - For more information see Page 9

Sirona
Control panel
Code: **SATMIXSIR-HP**
SATMIXSIR-LP



Carlova
Code: **KITSATCAR**





Sirona
Control panel
Code: SATMIXSIR-HP
SATMIXSIR-LP

Satellites Video



Scan the QR code with an app on your
smartphone to be taken to the featured video -
For more information see Page 9



Cyrene
Fixed head
Code: KITSATCYR

Aspirante wireless electric shower

We've applied our wireless mixer technology to this stunning electric shower. The power pack and all the plumbing is hidden in a loft or cupboard and the only thing on show is a sleek riser rail and handset and the elliptical elegance of the polished chrome control panel. Suitable for cupboard or loft installations.



Aspirante remote electric shower

This shower features the same elegant polished chrome control panel as the wireless model, the only difference is the controls are connected by a hidden wire to the power unit. Suitable for cupboard or loft installations.



Design freedom – position the Aspirante Wireless remote control anywhere within 10 metres of the power unit or within 3.5 metres for the remote version

Extensive choice – pick the remote for a traditionally installed kit or the wireless for the additional option of through the ceiling

Stylish contemporary designs – easy to use and easy to clean

Push button Start/Stop – to select your favourite shower setting every time

Phased Shutdown – when the shower is turned off, the water continues to run for a few seconds to flush out pre-heated water before stopping completely

'Low pressure' indicator – operates when the water pressure is insufficient

Rub clean showerhead – 5 spray pattern

Aspirante Wireless
Chrome

Code: ASP3CHR09SIWL – 9.5 kW
ASP3CHR10SIWL – 10.5 kW



Aspirante Remote
Chrome

Code: ASP3008SI – 8.5 kW
ASP3009SI – 9.5 kW
ASP3001SI – 10.5 kW

T300si wireless electric shower

This electric, wireless model benefits from the same clever showering technology as the Aspirante Wireless, but features a beautiful satin / chrome control panel. Suitable for cupboard or loft installations.



T300si remote electric shower

This shower features a clean white control panel and has the same features as the wireless model. The only difference is the controls are connected by a hidden wire to the power unit. Suitable for cupboard or loft installations.



Design freedom – position the Aspirante Wireless remote control anywhere within 10 metres of the power unit or within 3.5 metres for the remote version

Extensive choice – pick the remote for a traditionally installed kit or the wireless for the additional option of through the ceiling

Stylish contemporary designs – easy to use and easy to clean

Push button Start/Stop – to select your favourite shower setting every time

Phased Shutdown – when the shower is turned off, the water continues to run for a few seconds to flush out pre-heated water before stopping completely

'Low pressure' indicator – operates when the water pressure is insufficient

Rub clean showerhead – 5 spray pattern

T300si Video



Scan the QR code with an app on your smartphone to be taken to the featured video - For more information see Page 9



T300si Wireless
Satin/Chrome

Code: SP3009SIWLSA – 9.5 kW
SP3010SIWLSA – 10.5 kW




T300si Remote
White/Chrome

Code: SP3008SI – 8.5 kW
SP3009SI – 9.5 kW
SP3001SI – 10.5 kW

Electric Showers.

Triton are famous for electric showers, and with good reason. Advanced shower technology and outstanding design are combined to maximum effect in our extensive range. From the sumptuous ellipse of the Aspirante Wireless, to the funky interchangeable Topaz fascias, and the simple, contemporary design of the Z range, there's a model to match any bathroom or budget. Whether it be LCD displays, phased shutdowns, intelligent thermostatic controls or economy settings, all our electric showers benefit from the Triton commitment to innovation and affordable style. When choosing your shower, remember that the higher the kW rating, the better the performance so there's always a shower suitable for you.

What is an electric shower



Plumbing requirements for electric showers



Kw ratings explained



Electrical requirements for electric showers



Scan the QR code with an app on your smartphone to be taken to the featured video - For more information see Page 9

T150Z

thermostatic electric shower

Everyone should be free to enjoy a safe, invigorating shower experience. With its functional design, simple controls and advanced safety features including thermostatic performance and BEAB care accreditation, the T150Z brings total peace of mind for all your family.

Tri-Therm™ – a unique thermostatic process constantly regulating power, flow and temperature to comply with BEAB CARE offering the ultimate in precise control and safer showering.

Adjustable timed shutdown – set the shower to automatically shutdown after a pre-selected time

Adjustable maximum temperature stop – reduces the risk of accidentally turning the temperature too high

Push button Start/Stop – to select your favourite shower setting every time

Phased shutdown – when the shower is turned off, the water continues to run for a few seconds to flush out preheated water before stopping completely

'Low pressure' indicator – operates when the water pressure is insufficient

Rub clean showerhead – 5 spray pattern

T150Z

White/Chrome

Code: SP5G08WC – 8.5 kW

SP5G09WC – 9.5 kW



T150Z Pumped thermostatic electric shower

The T150Z pumped electric shower has the simple controls and advanced safety features of the T150Z electric shower, however it is suitable for low pressure systems. The thermostatic performance offers safer showering for all the family even when the water pressure is low or unreliable.



T150Z Pumped
White/Chrome

Code: SPSGPE08WC – 8.5 kW
SPSGPE09WC – 9.5 kW

Tri-Therm™ – a unique thermostatic process constantly regulating power, flow and temperature to comply with BEAB CARE offering the ultimate in precise control and safer showering.

Adjustable timed shutdown – set the shower to automatically shutdown after a pre-selected time

Adjustable maximum temperature stop – reduces the risk of accidentally turning the temperature too high

Push button Start/Stop – to select your favourite shower setting every time

Phased shutdown – when the shower is turned off, the water continues to run for a few seconds to flush out preheated water before stopping completely

'Low pressure' indicator – operates when the water pressure is insufficient

Rub clean showerhead – 5 spray pattern



Aspirante electric shower

Whether you're out to add a cool new touch, or find the inspiration for a whole new interior, Aspirante puts cutting-edge design at the heart of your bathroom.

Six stunning finishes. Natural, yet original. From the polished style of Black Gloss and White Gloss to the natural beauty of Riviera Sand, Aspirante has a finish that complements any bathroom. And with such innovative finish effects never having been seen on an electric shower before – ever – you can be sure you're giving your room a truly original look and feel.

Swivel-Fit™ – A 180° fully reversible swivel water inlet that accommodates water connections from either the left or right hand side of the unit to aid installation

Inspired minimalist design – subtle curved front with slender edges gives an illusion of floating in front of your tiles

Compact slimline design – gives a discreet and integrated appearance

Soft press illuminated power buttons

Push button Start/Stop – to select your favourite shower setting every time

'Power on' indicator

'Low pressure' indicator – operates when the water pressure is insufficient

Simple temperature control knob – easy grip with pleasing soft motion

Phased shut down – when the shower is turned off, the water continues to run for a few seconds to flush out preheated water before stopping completely

Rub Clean Showerhead – 5 spray pattern



Aspirante
Riviera Sand
Code: ASP08TLRSD – 8.5 kW
ASP09TLRSD – 9.5 kW



Aspirante
Gun Metal
Code: ASP08GUNMTL – 8.5 kW
ASP09GUNMTL – 9.5 kW





Aspirante electric shower

Aspirante may take shower design to the next level, but it does so without compromising quality or efficiency. Everything, from initial installation to intuitive operation, has been considered, honed and perfected.

No need to memorise obscure settings and indicators. Aspirante works as beautifully as it looks. One central control does everything you need – from switching on the shower to a perfectly delayed shutdown sequence. If only everything in life was so easy.



Swivel-Fit™ – A 180° fully reversible swivel water inlet that accommodates water connections from either the left or right hand side of the unit to aid installation

Inspired minimalist design – subtle curved front with slender edges gives an illusion of floating in front of your tiles

Compact slimline design – gives a discreet and integrated appearance

Soft press illuminated power buttons

Push button Start/Stop – to select your favourite shower setting every time

'Power on' indicator

'Low pressure' indicator – operates when the water pressure is insufficient

Simple temperature control knob – easy grip with pleasing soft motion

Phased shut down – when the shower is turned off, the water continues to run for a few seconds to flush out preheated water before stopping completely

Rub Clean Showerhead – 5 spray pattern



Aspirante
Brushed Steel

Code: ASP08BRSTL – 8.5 kW
ASP09BRSTL – 9.5 kW




Aspirante
Black Pearl

Code: ASP08TLPLBLK – 8.5 kW
ASP09TLPLBLK – 9.5 kW



Aspirante
White Gloss

Code: ASP08GSWHT – 8.5 kW
ASP09GSWHT – 9.5 kW



Aspirante
Black Gloss
Code: ASP08GSBLK – 8.5 kW
ASP09GSBLK – 9.5 kW

View
Aspirante
online
in 3-D

Topaz T100si

thermostatic electric shower

The pleasing form and funky interchangeable fascias of the Topaz T100si house some equally attractive technology. Not only does it feature an LCD display and thermostatic controls for precise temperature selection, it also has a unique limescale trap: easy to remove and clean for the unit's long lasting performance.

Thermostatic control – constantly regulated temperature gives the user more precise control and safer showering

LCD display indicates –

- Precise showering temperature
- Movements up or down in temperature
- Phased shutdown
- Low water pressure
- When showerhead needs cleaning

Push button Start/Stop – to select your favourite shower setting every time

Phased Shutdown – when the shower is turned off, the water continues to run for a few seconds to flush out preheated water before stopping completely

Choice of fascias

– 6 colours

Rub clean showerhead

– 5 spray pattern

Topaz T100si



Scan the QR code with an app on your smartphone to be taken to the featured video - For more information see Page 9

Topaz T100si

White

Code: SP1I48SI – 8.5 kW

SP1I49SI – 9.5 kW

SP1I41SI – 10.5 kW



lilac fascia
Code: TSTZFLIL



chrome fascia
Code: TSTZFCHR



azure fascia
Code: TSTZFAZU



aqua fascia
Code: TSTZFAQU



midnight fascia
Code: TSTZFMID



sea spray fascia
(supplied with unit)
Code: TSTZFSEA



Aspirante Topaz

thermostatic electric shower

This beautiful chrome ellipse creates a stunning centre piece in the contemporary bathroom. And with thermostatic temperature controls and clever functions like an LCD display and an easy-clean limescale trap, it's certainly not just a pretty face.



Thermostatic control – constantly regulated temperature gives the user more precise control and safer showering

LCD display indicates –

- Precise showering temperature
- Movements up or down in temperature
- Phased shutdown
- Low water pressure
- When showerhead needs cleaning

Push button Start/Stop – to select your favourite shower setting every time

Phased Shutdown – when the shower is turned off, the water continues to run for a few seconds to flush out preheated water before stopping completely

Choice of fascias
– 6 colours

Rub clean showerhead
– 5 spray pattern



Aspirante Topaz
Chrome
Code: ASP1149SI – 9.5 kW
ASP1141SI – 10.5 kW

Topaz T80si

thermostatic electric shower

This pristine white oval with a fixed chrome fascia, paired with a white and chrome riser rail and handset lends an elegance to any bathroom. And like all Topaz models it benefits from a thermostatic temperature control and a unique limescale trap for easy cleaning and lasting performance.



Thermostatic control – constantly regulated temperature gives the user more precise control and safer showering

Push button Start/Stop – to select your favourite shower setting every time

Phased Shutdown – when the shower is turned off, the

water continues to run for a few seconds to flush out preheated water before stopping completely

'Low pressure' indicator
– operates when the water pressure is insufficient

Rub clean showerhead
– 5 spray pattern



Topaz T80si
White/Chrome
Code: SP8148SI – 8.5 kW
SP8149SI – 9.5 kW
SP8141SI – 10.5 kW

Aspirante xr slimline electric shower

Paired with an all chrome riser rail and handset, this slimline model offers all over metallic chic with a polished chrome tablet shaped body and brushed chrome fascia.

Aspirante xr
Satin/Chrome
Code: ASP1009XR – 9.5 kW
ASP1001XR – 10.5 kW



Push button Start/Stop – to select your favourite shower setting every time

Phased Shutdown – when the shower is turned off, the water continues to run for a few seconds to flush out preheated water before stopping completely

'Low pressure' indicator
– operates when the water pressure is insufficient

'Power on' indicator

Rub clean showerhead
– 5 spray pattern



T100xr

slimline electric shower

This slimline model offers the best of all worlds with a pristine white body and brushed chrome effect fascia and an all chrome riser rail and handset.

Push button Start/Stop – to select your favourite shower setting every time

Phased Shutdown – when the shower is turned off, the water continues to run for a few seconds to flush out preheated water before stopping completely

'Low pressure' indicator
– operates when the water pressure is insufficient

'Power on' indicator

Rub clean showerhead
– 5 spray pattern

T100xr
White/Chrome
Code: SP1008XR – 8.5 kW
SP1009XR – 9.5 kW
SP1001XR – 10.5 kW



*It's easy to see why the **Z** is the UK's favourite shower.*

Easy to fit, easy to afford and easy to use, when it comes to T80Z there's a lot to love. But everyone's needs are different. That's why we've created a T80Z range consisting of the T80Z Slimline, T80Z Thermostatic and the new T80Z Fast-Fit.

T80Z Fast-Fit electric shower

T80Z Fast-Fit is the very latest generation of Britain's best-selling shower, the Triton T80, which has been an iconic household favourite for more than 30 years. Packed with design features that will appeal to both the homeowner and the professional installer, T80Z Fast-Fit boasts a curvaceous body shape and a sleek tapered backplate to provide a "floating" appearance on the bathroom wall. Featuring the latest Swing-Fit™ and Swivel-Fit™ installation technologies, T80Z Fast-Fit delivers Triton style, quality and showering performance.

Available in two finishes: Chrome or White/Chrome. Matched with a stylish, contemporary straight riser rail and three spray pattern handset, the T80Z Fast-Fit combines functionality, durability and style and will provide a beautiful focal point in your bathroom for years to come.



Swing-Fit™ – Terminal for left & right cabling

Swivel-Fit™ – A 180° fully reversible swivel water inlet that accommodates water connections from either the left or right hand side of the unit to aid installation

Push button Start/Stop – to select your favourite shower setting every time

'Low pressure' indicator – operates when the water pressure is insufficient

'Power on' indicator

Rub clean showerhead – 3 spray pattern



T80Z Fast-Fit
White/Chrome
Code: SP8007ZFF – 7.5 kW
SP8008ZFF – 8.5 kW
SP8009ZFF – 9.5 kW
SP8001ZFF – 10.5 kW

NEW

NEW

STYLISH NEW T80Z FAST-FIT



T80Z Fast-Fit
Chrome
Code: SP8CHR8ZFF – 8.5 kW
SP8CHR9ZFF – 9.5 kW
SP8CHR1ZFF – 10.5 kW



T80Z Slimline electric shower

Make a stylish statement with the T80Z Slimline shower. With its smooth lines, elegant curves and compact footprint, this electric shower adds a touch of modern design to your bathroom, and has inherited the same easy to install features as the T80Z with its 180° fully reversible water inlet.



Slimline design – for a more discrete appearance

Swivel-Fit™ – A 180° fully reversible swivel water inlet that accommodates water connections from either the left or right hand side of the unit to aid installation

Recessed illuminated Start/Stop – Allows you to select your favourite shower setting every time. Button illuminates to act as power on indicator

'Power on' indicator

'Low pressure' indicator – operates when the water pressure is insufficient

Rub clean showerhead – 5 spray pattern



T80Z Slimline
White/Chrome
Code: SP8008ZSLM – 8.5 kW
SP8009ZSLM – 9.5 kW
SP8001ZSLM – 10.5 kW



T80Z Slimline
Chrome: SP8CHR9ZSLM – 9.5 kW
SP8CHR1ZSLM – 10.5 kW

3/4 view

Compact and discreet. T80Z Slimline is smaller than an A4 of piece of paper



T80Z Slimline
Chrome
Code: SP8CHR9ZSLM – 9.5 kW
SP8CHR1ZSLM – 10.5 kW

T80Z Thermostatic electric shower

For constant precise showering temperatures choose the T80Z Thermostatic electric shower, with its contemporary good looks complemented by a premium matching riser rail and handset, its the ultimate affordable family shower.

T80Z Thermostatic

White/Chrome

Code: SP8008ZTHM – 8.5 kW

SP8009ZTHM – 9.5 kW



Thermostatic control – constantly regulated temperature gives the user more precise control and safer showering

Push button Start/Stop – to select your favourite shower setting every time

'Low pressure' indicator – operates when the water pressure is insufficient

'Power on' indicator

Stylish contrasting trim

Overlapping front cover – to hide any unsightly joins

Rub clean showerhead – 5 spray pattern





T80Z Thermostatic
Chrome
Code: SP8CHR9ZTHM – 9.5 kW
SP8CHR1ZTHM – 10.5 kW

T70Z

electric shower

The T70Z is more than just an entry level shower. Based on a proven Z range design blueprint, this model offers exceptional value for money with a simple design to complement any bathroom.

T70Z
White/Chrome
Code: SP7007Z – 7.5 kW
SP7008Z – 8.5 kW

Swivel-Fit™ – A 180° fully reversible swivel water inlet that accommodates water connections from either the left or right hand side of the unit to aid installation

Single control – for Start/Stop selection

Separate temperature and power controls

Rub clean showerhead
– 3 spray pattern



T90xr pumped electric shower

With an integrated pump, this simple, stylish unit is designed for homes where water pressure is low, unreliable or non-existent. The unit features the latest technology to make it significantly quieter and slimmer than its predecessors. It is also an ideal replacement for older T90 variants, with compatible water and cable connections for quick and easy installations.



T90xr
White/Chrome
Code: SP9008SI – 8.5 kW
SP9009SI – 9.5 kW

Push button Start/Stop
– to select your favourite shower setting every time

Rub clean showerhead
– 5 spray pattern



Safeguard Care Shower

Everyone should be free to enjoy a safe, invigorating shower experience. With its functional design, simple controls and advanced safety features, Safeguard brings total peace of mind to the bathrooms of the elderly, visually impaired or physically disabled.



BEAB CARE

RNIB



Safeguard Pumped Care Shower

Featuring the same easy to use operating features you would expect from a care shower. This pumped electric shower has BEAB CARE thermostatic performance, RNIB accreditation for extra safety assurance and an integral pump for use when water pressure is low or unreliable.



BEAB CARE

RNIB



Tri-Therm™ – a unique thermostatic process constantly regulating power, flow and temperature to comply with BEAB CARE offering the ultimate in precise control and safer showering.

Adjustable timed shutdown – set the shower to automatically shutdown after a pre-selected time

Adjustable maximum temperature stop – reduces the risk of accidentally turning the temperature too high

Large start/stop button – for easy selection of your favourite shower setting every time.

Phased shutdown – when the shower is turned off, the water continues to run for a few seconds to flush out preheated water before stopping completely

'Low pressure' indicator – operates when the water pressure is insufficient

Extended care riser rail kit and 2.0m double interlocking hose with an additional bracket for ease of use

Rub clean showerhead – 5 spray pattern

Safeguard
Care shower
White/Chrome
Code: C100SG08WC – 8.5 kW
C100SG09WC – 9.5 kW



Safeguard Pumped
Care shower
White/Chrome
Code: CSGPE08WC – 8.5 kW
CSGPE09WC – 9.5 kW

Care products

As the maker of Britain's best loved showers it is only natural that we would want everyone to be able to enjoy a Triton. That's why we were the first manufacturer to produce an electric shower specifically designed for care users. Through in-depth discussions with carers and advice from, among other organisations, RNIB and BEAB, Triton have developed innovative solutions for independent living. Design features such as audible controls and clearly defined operating controls, are just some of the benefits that our extensive care range has to offer.

Safety Accreditations

To ensure that you receive a safe, quality product, Triton work with recognised standards bodies who certify that our products meet their standards, delivering peace of mind for you and your family...



BEAB CARE mark is an accreditation developed for care establishments that require a higher level of temperature safeguards.



RNIB accreditation is achieved for showers designed for those visually impaired.



TMV3 is a standard created for thermostatic mixing valves that have enhanced thermal safety performance and comply with NHS Estates requirements.



TMV2 is an accreditation for thermostatic mixing valves that conform to BS-EN 1111 and 1287. Reliable thermal safety performance for domestic mixer showers.



WRAS The Water Regulations Advisory Scheme which monitors and approves the use of materials and products in contact with water supplies to prevent contamination of the water supply.

Elina thermostatic mixer shower

Exposed

With its striking cylindrical face the Elina TMV3 exposed delivers style, function and extra safety assurance that you expect from a care or commercial shower.

See our website for the extensive Elina product range and applications.



Elina TMV3 Exposed
Chrome
Code: **ELITMV3EXCM**



Thermostatic control – constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown – should either hot or cold water supplies fail

Separate flow and temperature controls – for ease of use

Tamper proof lever controls

Factory set maximum temperature at 38°C

Ideal use for care homes, hospitals and nursing homes

Shower kit, riser rail and shower head each sold separately

Mixer Showers.

Triton Mixers offer a dazzling range of style and function. Each model is expertly designed to provide a consistently invigorating shower, so all you have to do is choose an option that suits you best. Our collection features showers to complement the 21st century bathroom, from the fashionable vertical mixers to the innovative space saving mini mixers. Triton Mixers provide an extensive choice of styles from contemporary to traditional and even Edwardian inspired controls. The range is endless and the quality unbeatable, the only hard part is deciding which one you like best.

What is a
mixer shower



Types of
mixer shower



Features of a
mixer shower



Scan the QR code with an app on your smartphone to be taken to the featured video - For more information see Page 9

Unichrome Thames thermostatic mixer shower

Vertical Shower Pole

This fine looking vertical bar mixer with its innovative design and solid form, demands presence within your bathroom. A single diverter control combined with a deluge showerhead, delivers a sensual showering experience.

Unichrome Thames
Shower Pole
Code: UNTHTHSP

How to install a
Triton Showerpole



Scan the QR code with an app on your
smartphone to be taken to the featured video
- For more information see Page 9

Thermostatic control
– constantly regulated
temperature gives the user
more precise control and
safer showering

Automatic shutdown
– should either the hot or
cold water supplies fail

**Separate flow and
temperature controls**

Large fixed showerhead

Microphone showerhead
– single spray pattern



Unichrome Thames

thermostatic mixer shower

Unichrome Thames
Vertical bar mixer
Code: UNTHTHBMVT

Vertical Bar Mixer

Offering a new angle on the Thames range, this vertical bar mixer provides an innovative way to make a statement in the bathroom. Stylish tubular controls for separate temperature and flow selection are accompanied by an elegant curved riser rail, soap dish and handset. A fashionable choice for the modern bathroom.

Thermostatic control – constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown – should either the hot or cold water supplies fail

Separate flow and temperature controls

Rub clean showerhead
– 3 spray pattern

How to install a
Vertical Bar Mixer



Scan the QR code with an app on your smartphone to be taken to the featured video - For more information see Page 9



WRAS
Approved Product

Unichrome Thames thermostatic mixer shower

Vertical Bar Mixer with Fixed Showerhead

Make a stylish statement with this mixer shower. With its compact vertical control valve, slender pole and shapely showerhead, this shower is the ultimate in elegance to complement any bathroom.

How to install a
Vertical Bar Mixer



Scan the QR code with an app on your smartphone to be taken to the featured video - For more information see Page 9

Unichrome Thames
Vertical Bar Mixer
with fixed head
Code:
UNTHTHBMVTFH

Thermostatic control
– constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown
– should either the hot or cold water supplies fail

Separate flow and temperature controls

Large fixed showerhead



Unichrome Thames

thermostatic mixer shower

Bar Diverter

This mixer offers a combination of shower types in one sleek and minimal contemporary design. Use the bar diverter's tubular controls to switch between a forceful downpour from the fixed head or a more vibrant, directional flow from the handset.

Thermostatic control – constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown – should either the hot or cold water supplies fail

Adjustable Fixed Head
– 1 spray pattern

Microphone Showerhead
– 1 spray pattern

Unichrome Thames
Bar Diverter Mixer
Code: UNTHTHBM



WRAS
APPROVED
PRODUCT

Unichrome Thames thermostatic mixer shower

Dual Control

A restrained rectangular design matched with tactile circular dials in contemporary chrome, this mixer offers another stylish option in the Thames range. This model features separate controls for flow and temperature and is available with a suitably elegant all chrome handset and riser rail.

Dual Control Diverter

With a diverter added to the flow control, this mixer offers contemporary styling and an array of showering choices. Switch between the two water outlets with the tactile circular flow dial and create your perfect shower combination. Customise your bathroom design by selecting from the range of heads and spouts.

Thermostatic control
– constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown
– should either the hot or cold water supplies fail

Rub clean showerhead
– 5 spray pattern

Unichrome Thames
Dual control mixer
Code: **UNTHDCMX**



Unichrome Thames
Dual control mixer
with diverter
Code: **UNTHDCDIV**

Shown with bath
spout and adjustable
showerhead.



Choose this...

...and any two of these.



+



Unichrome Thames Dual control
mixer with diverter
Code: **UNTHDCDIV**

Adjustable showerhead with
single spray pattern & arm
Code: **FHBEARM**

Fixed showerhead
with single spray pattern
Code: **VREXBTCE**

Bath spout
Code: **BATHSP**

Riser rail with 5 spray
pattern showerhead
Code: **TSKFLE07000CH**
See pages 73-76 for more
accessory options

Unichrome Thames

thermostatic mixer shower

Exposed

This elegant contemporary exposed mixer features separate flow and temperature controls in a handsome unit. Paired with a matching chrome handset and a subtly curved riser rail, it is a confident presence in any style of bathroom.

Built-in

With separate flow and temperature controls set in a beautiful chrome disc, this built-in model adds a minimal chic to contemporary bathrooms.



Thermostatic control
– constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown – should either the hot or cold water supplies fail

Rub clean showerhead – 5 spray pattern



Unichrome Thames
Exposed Mixer
Code: **UNTHEXCM**

Unichrome Thames

tap collection

Complete the minimalist look with matching taps.



Choice of 5 tap designs:

- Basin Mixer with pop up waste
- Basin Mixer without waste
- Basin Mixer Vessel
- Bath Filler
- Basin Taps
- Bath Taps



Basin Mixer with pop-up waste
Code: **UNTHTPBAM**



Basin Mixer without waste
Code: **UNTHTPBAMNW**



Basin Mixer Vessel
Code: **UNTHTPBAMNWT**



Basin Taps
Code: **UNTHTP1-2**



Bath Taps
Code: **UNTHTP3-4**



Bath Filler
Code: **UNTHTP1HBF**



Unichrome Thames
Built-in
Code: UNTHBTCM



Unichrome Thames thermostatic mixer shower

Exposed Sequential

Set at the heart of this cylindrical exposed chrome mixer is a single sequential control for both flow and temperature.

Built-in Sequential

A circular, single sequential control for flow and temperature echoes the curving chrome body of this built-in mixer. Set flush to the wall, this model defines understated chic.



Thermostatic control
– constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown
– should either the hot or cold water supplies fail
Rub clean showerhead
– 5 spray pattern

Unichrome Thames
Built-in sequential mixer
Code: UNTHHTBTSM



Unichrome Thames
Exposed sequential mixer
Code: UNTHTHEXSM



Unichrome Thames thermostatic mixer shower

Exposed Single Lever

The modest form of this perfectly compact chrome mixer is perfectly complemented by a single lever which controls both flow and temperature. Unlike the sequential mixer opposite, this single lever will gradually increase the flow of water to give greater control of your shower.

Unichrome Thames
Exposed single lever mixer
Code: UNTHTHEXSL

Thermostatic control
– constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown
– should either the hot or cold water supplies fail

Rub clean showerhead
– Single spray pattern



Introducing The Mini Mixer Range

Big on Style, compact on size.

Our new 'mini' concentric and sequential mixers are bang on the trend for minimalist shower controls.

Unichrome Thames thermostatic mixer shower

Exposed Mini

This space saving exposed mixer features separate flow and temperature controls in a compact design.

Built-in Mini

With its simple controls set in a beautiful chrome disc, this built in model adds a touch of chic to any bathroom.



WRAS
Approved Product

Thermostatic control
– constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown
– should either the hot or cold water supplies fail

Separate flow and temperature controls

Rub clean showerhead
– 3 spray pattern

Mini Mixer Installation



Scan the QR code with an app on your smartphone to be taken to the featured video - For more information see Page 9

Unichrome Thames
Built-in mini mixer
Code: **UNTHBTCMMN**




Unichrome Thames
Exposed mini mixer
Code: **UNTHEXCMMN**

Up to 30% smaller than a traditional valve...

The latest innovation from Triton, mini mixers have the same curvy styling as their sister mixer showers, but are considerably smaller in size. Minimalist contemporary showers with all the performance of a conventional mixer shower.

Mini valve



Traditional valve



Unichrome Thames thermostatic mixer shower

Exposed Mini Sequential

This space saving exposed mini chrome mixer has a sequential control for both flow and temperature.

Built-in Mini Sequential

Adding simplicity to the signature Thames design offers a simple, neat mini mixer that has been purposely understated.

Unichrome Mersey thermostatic mixer shower

Exposed Mini Sequential

A sleek cross handle design that delivers a minimalist style mixer shower to transform the look and feel of your bathroom.


Built-in Mini Sequential

Complete the minimalist look with the addition of this beautiful chrome disc that accompanies this inconspicuous built in mixer. The Mersey's distinctive cross handled design within a compact body delivers minimalist style for your bathroom.

Thermostatic control
– constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown
– should either the hot or cold water supplies fail

Rub clean showerhead
– 3 spray pattern

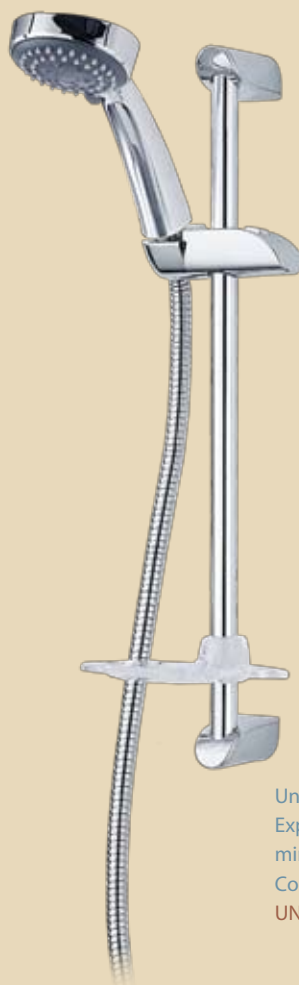

Unichrome Thames
Built-in sequential mini mixer
Code: UNTHHTBTSMMN

Unichrome Thames
Exposed sequential
mini mixer
Code:
UNTHTHEXSMMN



Unichrome Mersey
Built-in sequential mini mixer
Code: UNMETHBTSMMN

Unichrome Mersey
Exposed sequential mini mixer
Code: UNMETHXSMMN



Unichrome Mersey

thermostatic mixer shower

Exposed Sequential

A beautiful, compact and functional all chrome body with the same single control as the built-in version. This contemporary shower is complemented by a stylish curved riser rail and handset.

Built-in Sequential

This cylindrical design is fitted flush into the wall making a stylish statement. The single cross handle control for flow and temperature is shaped for easy function and pleasing form.



Unichrome Mersey
Built-in sequential mixer
Code: UNMETHBTSM



Unichrome Mersey
Exposed sequential mixer
Code: UNMETHEXSM



Thermostatic control
– constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown
– should either the hot or cold water supplies fail

Rub clean showerhead
– 5 spray pattern

Unichrome Mersey

thermostatic mixer shower

Dual Control

The Mersey range is noted for the cross head styling accent on its controls. In this built-in model they are set into a stunning chrome rectangular plate for a bold, iconic statement. This model features separate controls for flow and temperature and is available with a suitably elegant all chrome handset and riser rail.



Unichrome Mersey
Dual control mixer
Code: **UNMEDCMX**

Thermostatic control
– constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown
– should either the hot or cold water supplies fail

Rub clean showerhead
– 5 spray pattern



WRAS
Approved Product

Unichrome Mersey thermostatic mixer shower

Exposed

This exposed mixer features separate flow and temperature cross head controls in a striking cylindrical chrome body. Matched here with an all-chrome riser rail and handset for a stunning effect.

Built-in

Separate controls for flow and temperature are the centerpiece of this beautiful, built-in chrome disc mixer, complemented by an elegantly curved riser rail and handset.



Thermostatic control – constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown
– should either the hot or cold water supplies fail

Rub clean showerhead
– 5 spray pattern



Unichrome Mersey
Built-in mixer
Code: UNMEBTCM



Unichrome Mersey
Exposed mixer
Code: UNMEEXCM



Unichrome Mersey thermostatic mixer shower

Built-in fixed head

Here the mixer's built-in chrome disc is complemented by a large circular fixed head for a truly luxurious downpour.



Thermostatic control – constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown – should either the hot or cold water supplies fail

Rub clean fixed showerhead – Single spray pattern



Unichrome Mersey
Built-in mixer with fixed head
Code: UNMEBTCMFH



Unichrome Mersey thermostatic mixer shower

Exposed fixed head

This exposed model combines its pleasantly durable cross head controls for temperature and flow with a striking fixed showerhead and exposed chrome water pipe.

Unichrome Mersey
Exposed mixer with fixed head
Code: UNMEEXCMFH



WRAS
APPROVED
PRODUCT

Thermostatic control – constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown – should either the hot or cold water supplies fail

Fixed showerhead – Single spray pattern

Unichrome Mersey thermostatic mixer shower

Bar Diverter

Combining the forces of a large fixed head and an adjustable height handset, this mixer with diverter offers a combination of showering sensations in one highly sophisticated design. Diverter control and temperature controls feature the distinctive Mersey cross head styling.



Bar Mixer

Featuring the same striking tubular design as the rest of the Mersey range, this bar mixer variation also offers the versatility of a separate riser rail, soap dish and handset plus individual controls for temperature and flow.



Bar Mixer Fixed Head

This commanding bar mixer features pleasingly styled cross head controls for temperature and flow at either end of its tubular form. Here the mixer's lines are complemented by a large fixed head for a truly luxurious downpour.



Thermostatic control
– Constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown
– should either the hot or cold water supplies fail

Bar diverter:
Microphone Showerhead
– 1 spray pattern
Adjustable Fixed Head
– 1 spray pattern

Bar mixer:
Rub Clean Showerhead
– 5 spray pattern
Adjustable Fixed Head
– 1 spray pattern



Unichrome Mersey
Bar Diverter mixer
Code: UNMETHBMDIV



Unichrome Mersey
Bar mixer
Code: UNMETHBM



Unichrome Mersey Bar
mixer with fixed head
Code: UNMETHBMFH

Unichrome Dart

thermostatic mixer shower

Exposed/Built-in

This classic mixer design is typical of Triton's successful blend of form and function. The shower has the versatility of either being installed as a stylish exposed mixer or a sleek built-in mixer.



Thermostatic control
– constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown
– should either the hot or cold water supplies fail

Adjustable maximum temperature stop
– reduces the risk of accidentally turning the temperature too high

Rub clean showerhead
– 5 spray pattern

Built-in with Fixed Head

With all the same benefits as the Dart Built-in here the mixer completes its simple yet stylish look with a fixed head.



Thermostatic control
– constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown
– should either the hot or cold water supplies fail

Adjustable maximum temperature stop
– reduces the risk of accidentally turning the temperature too high

Rub clean fixed showerhead
– 5 spray pattern

Unichrome Dart
Exposed/Built-in mixer
Code: **UNDATHCM**



Unichrome Dart Built-In
with Fixed Head
Code: **UNDATHCMBTFH**



Unichrome Avon thermostatic mixer shower

Dual Control

This Edwardian-inspired mixer and 5" fixed head shower rose, lends a period elegance to your bathroom. A ceramic lever controls flow and a voluptuous cross head dial adjusts temperature.



Thermostatic control
– constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown – should either the hot or cold water supplies fail

5" Fixed shower rose
– Single spray pattern

Unichrome Avon
Dual control mixer
Code: UNAVBACH

Unichrome Tyne thermostatic mixer shower

Bar Mixer

With its contemporary zeppelin-shaped body, this bar mixer is aesthetically pleasing and satisfying to use. An elegant all chrome riser rail and handset complete the look.



Thermostatic control
– constantly regulated temperature gives the user more precise control and safer showering

Adjustable maximum temperature stop
– reduces the risk of accidentally turning the temperature too high

Automatic shutdown
– should either the hot or cold water supplies fail

Rub Clean Showerhead
– 5 spray pattern

Unichrome Tyne
Bar mixer
Code: UNTYTHBM



Unichrome Nene Cool Touch

thermostatic mixer shower

Bar Mixer

For comfortable everyday showering, there's the new Nene Cool Touch - when the valve is in operation, the surface of the metal valve body does not get warm to the touch, unlike many conventional bar mixers. Accompanied with a three-position showerhead and stylish control knobs, the Nene Cool Touch is the ideal family showering solution.



Cool Touch feature – ensures that the metal valve body does not get warm to the touch, unlike conventional bar mixer showers

Thermostatic control – constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown – should either the hot or cold water supplies fail

Adjustable maximum temperature stop – reduces the risk of accidentally turning the temperature too high


Rub Clean Showerhead – 3 spray pattern

Nene Cool Touch - how does it work?

For extra reassurance



The hot supply runs across the valve before being mixed, heating the valve body - **uncomfortable if touched.**

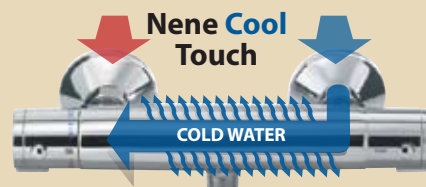

The cold supply runs across the valve before being mixed, cooling the valve body - **pleasant if touched.**

Flow rates and the position of flow and return connections are unaffected, making the Nene Cool Touch an ideal choice for both replacement and new installations.

Unichrome Nene Cool Touch Bar Mixer
Code: UNNETHBMCT





Unichrome Nene Bar Mixer with Diverter & Body Jets thermostatic mixer shower

Bar Mixer

For the ultimate showering experience, this stylish contemporary Nene bar mixer diverter incorporates three powerful body jets and a large fixed rain showerhead into its striking tubular design. An elegant slimline handset and hose provide a third showering option to enhance performance.



Thermostatic control – constantly regulated temperature gives the user more precise control and safer showering

Diverts water flow
– to either the fixed head, handset or body jets

Automatic shutdown
– should either the hot or cold water supplies fail

Adjustable maximum temperature stop – reduces the risk of accidentally turning the temperature too high

Three, two mode body jets
Fixed showerhead with tilt adjustment – Single spray pattern

Adjustable fixed showerhead
– Single spray pattern

Rub Clean Showerhead
– Single spray pattern



Unichrome Nene
Bar mixer
Code: **UNNETHBMDIV**

Unichrome Aire

thermostatic mixer shower

Bar Mixer

This mixer demands an audience with its proud and appealing form. A stylish combination of performance and design, the mixer is matched with a sleek all chrome riser rail and handset.

Unichrome Aire
Bar mixer
Code: **UNAITHBM**

Thermostatic control

– constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown

– should either the hot or cold water supplies fail

Adjustable maximum

temperature stop – reduces the risk of accidentally turning the temperature too high

Rub Clean Showerhead

– 1 spray pattern



Unichrome Aire

thermostatic mixer shower

Bath/Shower Mixer

Combining sophistication with simplicity, the Aire bath and shower mixer comes with either an all chrome riser rail and handset or a handset and wall bracket.



Thermostatic control
– constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown
– should either the hot or cold water supplies fail

Adjustable maximum temperature stop – reduces the risk of accidentally turning the temperature too high

Rub clean showerhead
– 5 spray pattern

Unichrome Aire
Bath/Shower mixer
with wall bracket
Code: UNAITHBSM

Unichrome Aire
Bath/Shower mixer
with riser rail
Code: UNAITHBSMRR

Unichrome Dove

thermostatic mixer shower

Bar Mixer

The Dove mixer offers outstanding performance, is beautifully styled and extremely affordable. Paired with an all chrome riser rail and handset it is a suitably elegant addition to any bathroom.



Thermostatic control

– constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown

– should either the hot or cold water supplies fail

Adjustable maximum temperature stop

– reduces the risk of accidentally turning the temperature too high

Rub clean showerhead

– 3 spray pattern

Bar Diverter

With its sophisticated design the Dove bar diverter allows you to alternate the flow of water from the large saucer fixed showerhead or the microphone showerhead for a more invigorating shower.



Thermostatic control

– constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown

– should either the hot or cold water supplies fail

Separate flow and temperature controls

Adjustable maximum temperature stop

– reduces the risk of accidentally turning the temperature too high

Large fixed showerhead

Microphone showerhead

– Single spray pattern




Unichrome Dove
Bar mixer

Code: UNDOETHBM

Unichrome Dove
Bar Mixer with Diverter
Code: UNDOETHBMDIV



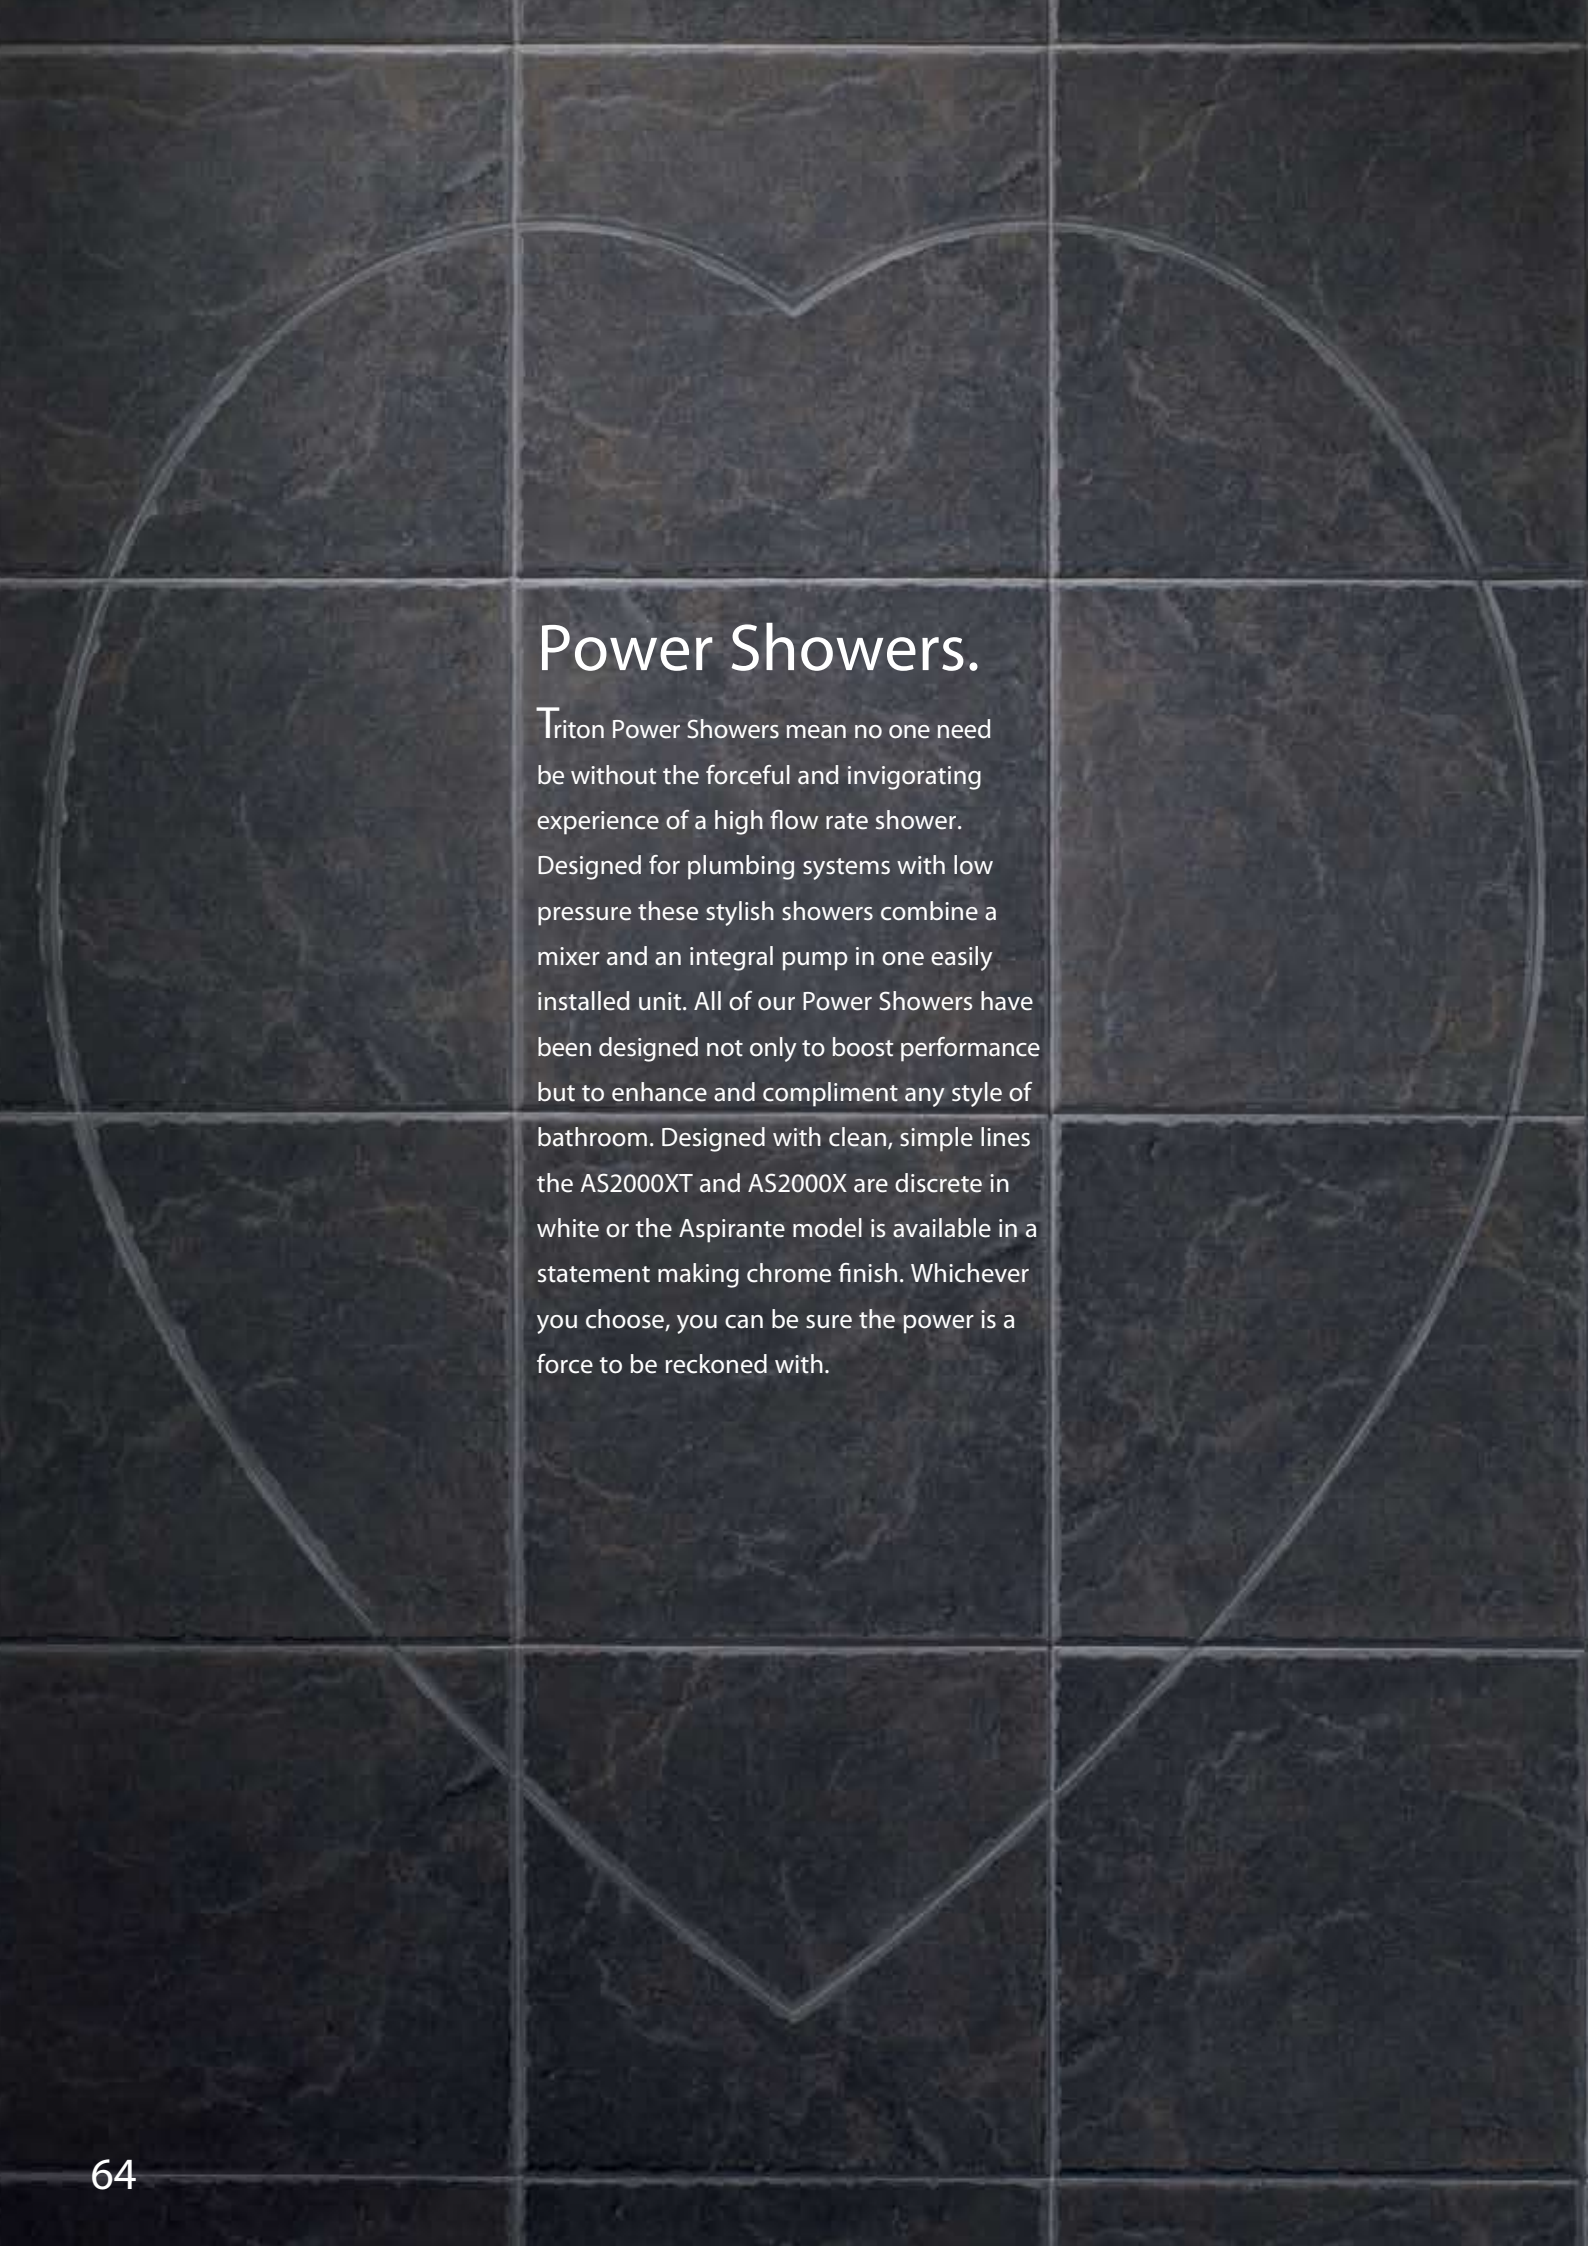

Power Showers.

Triton Power Showers mean no one need be without the forceful and invigorating experience of a high flow rate shower. Designed for plumbing systems with low pressure these stylish showers combine a mixer and an integral pump in one easily installed unit. All of our Power Showers have been designed not only to boost performance but to enhance and compliment any style of bathroom. Designed with clean, simple lines the AS2000XT and AS2000X are discrete in white or the Aspirante model is available in a statement making chrome finish. Whichever you choose, you can be sure the power is a force to be reckoned with.

Aspirante thermostatic power shower

Aspirante
Power shower
Chrome
Code: ASP2000THM

Under a beautifully restrained polished chrome fascia, this power shower has an integrated pump that provides a luxuriously high flow rate of 14 litres per minute. Matched with an all chrome riser rail and handset this model offers optimum style and performance in any bathroom.



Thermostatic control – constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown – should either the hot or cold water supplies fail

Adjustable maximum temperature stop – reduces the risk of accidentally turning the temperature too high

Numbered temperature control – to select your favourite shower setting every time

Rub clean showerhead – 5 spray pattern

AS2000XT

thermostatic power shower

This thermostatically controlled shower is suitable for low pressure systems and delivers a flow rate of up to 14 litres of beautifully warm water per minute. The mixer and pump system is housed in a pristine white fascia and paired with a white/chrome riser rail and handset, to blend with any style of bathroom.



Thermostatic control

– constantly regulated temperature gives the user more precise control and safer showering

Automatic shutdown

– should either the hot or cold water supplies fail

Adjustable maximum temperature stop

– reduces the risk of accidentally turning the temperature too high

Push button Start/Stop

– to select your favourite shower setting every time

Rub clean showerhead

– 5 spray pattern



AS2000XT
Power shower
White/Chrome
Code: **TAS2000XTHM**



AS2000X

manual power shower

Suited only to low pressure systems, this power shower also provides an outstanding flow rate of up to 14 litres per minute, but with manual temperature control.



Adjustable maximum temperature stop

– reduces the risk of accidentally turning the temperature too high

Push button Start/Stop

– to select your favourite shower setting every time

Rub clean showerhead

– 5 spray pattern



AS2000X
Power shower
White/Chrome
Code: **TAS2000XMAN**



Low pressure? No problem.

If you have your heart set on a mixer model that requires high pressure, a shower tower for instance, but you have low pressure, don't worry because it is possible to boost it. Choose the mixer shower you want, then connect a Triton T550i pump to your system and you can have a high pressure flow rate from a low pressure system. The pump can be hidden in an airing cupboard or under the bath, so you can simply enjoy a luxurious powerful and stylish shower while the hard work goes on behind the scenes.

An increased flow rate may mean you have to increase the capacity of your hot and cold water tanks, so ask your plumber about the system you have. For more information on the types of pumps available see page 72.


T550i
Pump
Code: T550I00M



Unichrome Mersey Bar
mixer with fixed head
Code: UNMETHBMFH

See page 55



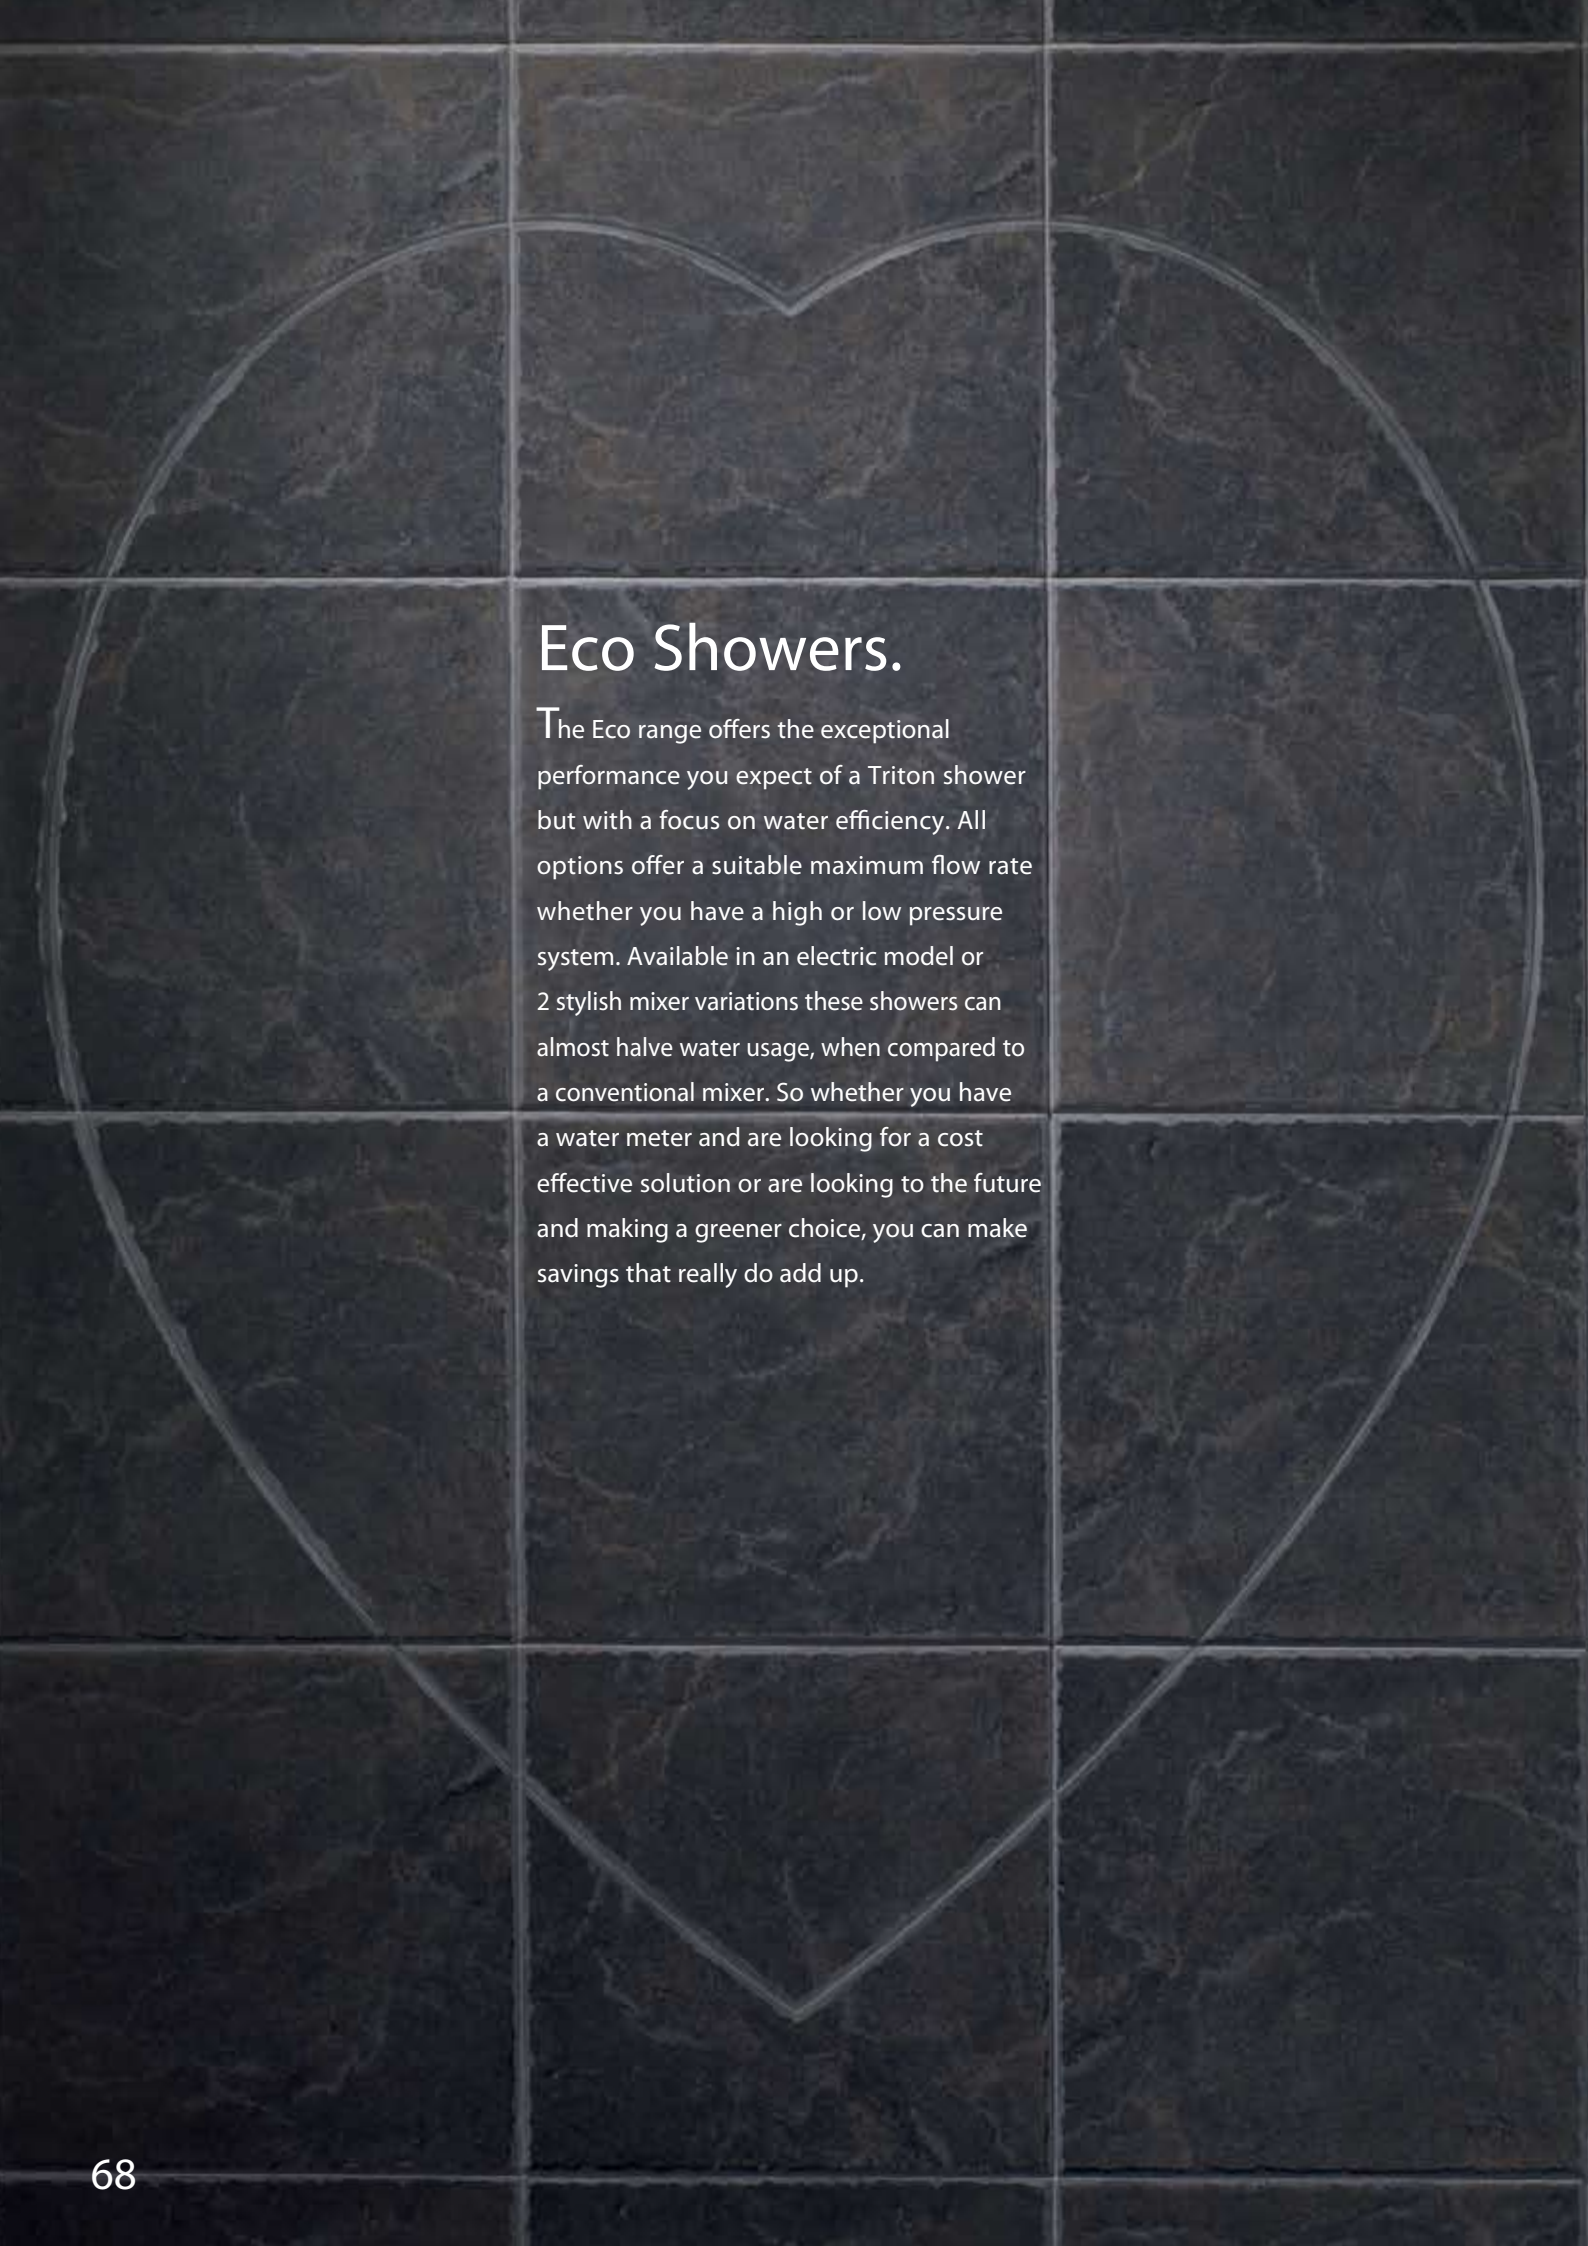

Eco Showers.

The Eco range offers the exceptional performance you expect of a Triton shower but with a focus on water efficiency. All options offer a suitable maximum flow rate whether you have a high or low pressure system. Available in an electric model or 2 stylish mixer variations these showers can almost halve water usage, when compared to a conventional mixer. So whether you have a water meter and are looking for a cost effective solution or are looking to the future and making a greener choice, you can make savings that really do add up.

The New Eco Range

Unichrome Dart Eco

Providing the same choice of exposed or built-in designs as the standard Dart mixer shower, this Eco model has an integrated flow regulator to deliver a maximum flow rate of 9 litres per minute. The unit is matched with an all chrome riser rail and 5 spray pattern handset.



Unichrome Dove Eco

Our ecological bar mixer is the same design as the standard Dove model but its sleek body houses a fixed flow regulator that cannot be altered, delivering a maximum flow of 6 litres per minute. The chrome bar is complemented by an all chrome riser rail and 3 spray pattern showerhead.



The table below shows the water savings allowed by the Triton Eco range when compared to a conventional mixer shower. Over the lifetime of a shower, this represents substantial water savings.

| Shower type | Conventional mixer | Triton Dart Eco | Triton Dove Eco |
|----------------|--------------------|-----------------|-----------------|
| Litres per min | 12 | 9 | 6 |
| Total usage* | 60 | 45 | 30 |

*(Per person per day) assuming one 5 minute shower



Unichrome Dart Eco
Code: ECODATHCM

Unichrome Dove Eco
Code: ECODOTHBM

The New Eco Range

T80Z Fast-Fit Eco Electric

The T80Z Fast-Fit Eco offers a stylish solution for those looking for an ecologically responsible maximum flow of 6 litres a minute. The shower's sleek tapered backplate provides a "floating" appearance on the bathroom wall and is complemented by a contemporary straight riser rail and three spray pattern handset. Featuring the latest Swing-Fit™ and Swivel-Fit™ installation technologies, T80Z Fast-Fit Eco delivers Triton style, quality and showering performance



T80Z Fast-Fit Eco
White/Chrome
Code: ECO8008ZFF – 8.5kW

T80Z Slimline Eco Electric

Providing a satisfying shower yet meeting water conservation needs, this Eco electric shower delivers a maximum flow rate of just 6 litres a minute. The T80Z Slimline Eco is complemented by a white chrome riser rail and handset with 5 spray pattern options.



T80Z Slimline Eco
White/Chrome
Code: ECO8008ZSLM – 8.5 kW



Bathroom Accessories.

Beautiful showers deserve beautiful surroundings. That's why Triton have designed a range of accessories with the same attention to detail, quality and style as our showers.

Pumps

With Triton's range of booster pumps you can get the power performance you demand from your shower, turn any mixer into a power shower or simply boost your low pressure flow rate.

T40i Bath/shower mixer booster pump

The T40i booster pump offers a no-plumb solution to increase the flow of your bath mixer or shower. Simply connect to your existing mixer outlet with the supplied hose and the small, unobtrusive unit will instantly boost your flow rate.



T40i
Code: T040004I

T550i Twin impeller booster pump

The T550i is the unit to opt for if you want to convert a mixer shower into a high flow rate shower of up to 1.2 bar.



T550i
Code: T550I00M

T450i Single impeller booster pump

If you are experiencing low pressure cold mains problems with your electric shower, this pump is the solution, boosting the supply from your cold water tank and in turn your flow rate.



T450i
Code: T450I00M



Provides increased water pressure

T40i

T550i upto 1.2 bar

T450i upto 1.2 bar

Triton

Shower Accessories

Ideal for most shower installations, Triton have a great range of accessories to suit your showering needs. Showerheads for electric, mixer and power showers offer a choice of spray patterns to suit your mood, and elegantly mounted riser rails include an adjustable bracket which allows you to alter the height and angle of the showerhead.



1.25m Chrome hose

Code: TSHG1203

1.75m Chrome hose

Code: TSHER103

2m Chrome hose

Code: TSHG1266

Showerarm is not included



Alice fixed head chrome

Code: TSHFALICCH



Beth fixed head chrome

Code: TSHFBETHCH



Alex fixed head chrome

Code: TSHFALEXCH



Emily fixed head chrome

Code: TSHFEMILCH



Grace fixed head chrome

Code: TSHFGRACCH



Isabel fixed head chrome

Code: TSHFISABCH



Kelsey fixed head chrome

Code: TSHFKELSCH



Kelsey fixed head black

Code: TSHFKELSBL

Triton

Shower Accessories

Pack includes showerhead only (suitable for all showers)



7000 Series chrome/grey
care showerhead
Code: **TSHE7CACH**



7000 Series chrome
showerhead
Code: **TSHE7RCCHR**



7000 Series satin
showerhead
Code: **TSHE7RCSAT**



7000 Series white/grey
care showerhead
Code: **TSHE7CAWH**



7000 Series white
showerhead
Code: **TSHE7RCWHT**



Lara 3 Position chrome
showerhead
Code: **TSHMLAR3POSCH**



Lara 3 Position white
showerhead
Code: **TSHMLAR3POSWH**



Lily 1 Position chrome
showerhead
Code: **TSHULIL1CH**



Nitro 1 Position chrome
showerhead
Code: **TSERIHEADCHR**



Nitro 1 Position white
showerhead
Code: **TSERIHEADW**

Pack includes showerhead only (suitable for mixer and power showers)



Laura 5 Position
chrome showerhead
Code: **TSHMLAU5CH**



Kirsty 5 Position
chrome showerhead
Code: **TSHMKIR5CH**



Emma 1 Position
chrome showerhead
Code: **TSHMEMM1CH**



Ella 1 Position
chrome showerhead
Code: **TSHMELL1CH**



Amber 1 Position
chrome showerhead
Code: **TSHMAMB1CH**

Triton

Shower Accessories

Pack includes showerhead only (suitable for mixer and power showers)



Kate 1 Position
black showerhead
Code: TSHMKAT1BL



Kate 1 Position
chrome showerhead
Code: TSHMKAT1CH



Aimee 1 Position
chrome showerhead
Code: TSHMAIM1CH



Leah Eco showerhead
Code: TSHMLEA2CH

Choose Leah
Eco to meet
the Code for
Sustainable
Homes

Pack includes kit and riser rail only



Joshua kit white/chrome
Code: TSKJOSHC



Joshua kit satin grey
Code: TSKJOSHSG



Joshua kit chrome
Code: TSKJOSHCH



Aaron kit white/chrome
Code: TSKAAROWC



Aaron kit chrome
Code: TSKAAROC



David kit white/chrome
Code: TSKDAVIC



Alfie kit white/chrome
Code: TSALFEC



Alfie kit chrome
Code: TSALFEC



Connor kit white/chrome
Code: TSKCONNWC



Connor kit chrome
Code: TSKCONNCH



Leon kit white/chrome
Code: TSKLEONWC



Leon kit chrome
Code: TSKLEONCH

Triton

Shower Accessories

Pack includes kit and riser rail only



Adam kit chrome
Code: TSKADAMCH



Andrew kit chrome
Code: TSKANDRCH



Callum kit chrome
Code: TSKCALLCH



Venus kit chrome
Code: TSKVENUCH



Extended care kit white/grey
Code: TTSCAREKWTGYEX

Extended care kit chrome/grey
Code: TSCAREKCRGYEX

Pack includes kit, riser rail, showerhead and hose (suitable for all showers)



Joshua kit white/chrome
& Lily showerhead
Code: TSKFJOSLILWC



Joshua kit satin grey &
7000 series showerhead
Code: TSKFJOS7000SG



Joshua kit chrome
& Lily showerhead
Code: TSKFJOSLILCH



Aaron kit white/chrome
& Nitro showerhead
Code: TSKFAARNITWC



David kit white/chrome
& Lara showerhead
Code: TSKFDAVLARWC



Aaron kit chrome
& Nitro showerhead
Code: TSKFAARNITCH



Alfie kit white/chrome
& Lara showerhead
Code: TSKFALFLARWC



Alfie kit chrome
& Lara showerhead
Code: TSKFALFLARCH



Connor kit white/chrome
& Lara showerhead
Code: TSKFCONLARWC



Connor kit chrome
& Lara showerhead
Code: TSKFCONLARCH



Leon kit white/chrome &
7000 series showerhead
Code: TSKFLEO7000WC



Leon kit chrome &
7000 series showerhead
Code: TSKFLEO7000CH

Triton

Shower Accessories

Pack includes kit, riser rail, showerhead and hose (suitable for mixer and power showers)



Andrew kit chrome
& Emma showerhead
Code: TSKFANDEMMCH



Adam kit chrome
& Kirsty showerhead
Code: TSKFADAKIRCH



Callum kit chrome
& Kate showerhead
Code: TSKFCALKATCH



Venus kit chrome
& Laura showerhead
Code: TSKFVENLAUCH

Metlex Buckingham

Accessories



Linen bin
ABU0003



Locking medicine cabinet
ABU001LM



Double sliding door/one locking
ABU2213D



Single door cabinet
with bevelled mirror
ABU510B



Double door cabinet
with bevelled mirror
ABU512B



Single door corner cabinet
with bevelled mirror
ABU14B



Double sliding door cabinet
ABU2215



Metlex Mercury

Accessories



Wire soap rack
AME9012S



Frosted glass tumbler
& holder
AME9005S



Toilet roll holder
AME9001S



Towel ring
AME9002S



Frosted glass soap dish & holder
AME9004S



2-tier corner basket
AME9022S



Single corner basket
AME9020S



8" 2-tier wire rack
AME9016S



16" 2-tier wire rack
AME9017S



Double robe hook
AME9009S



Toilet brush &
frosted glass
holder
AME9010S



16" wire rack
AME9014S



24" toughened glass shelf
AME9003S



24" towel rail
AME9006S



Metlex Carlton

Accessories



Toilet roll holder – locking
wooden roller
ACT267BLC



Toilet roll holder – white
ACT267PW



Shower rail
ACTR481
25 x 1220 x 25mm

Shower rail
ACTR721
25 x 1830 x 25mm

Chromium plated bend
+ connecting spigots
ACTR991

Pair of shower rail flanges
+ cover plates
ACTRF981

Curtain rings (pack of 12)
ACT19112

18" Ceiling support
ACTV1931



Angled
grab bar
ACT171C



Grab bar
25mm
ACT169AC

Toilet roll holder
ACT267C



Toilet roll holder
ACT267BC



Double towel rail
ACT269A24C



Single towel rail
ACT26918C
58 x 520 x 64mm

Single towel rail
ACT26924C
58 x 670 x 64mm

Metlex Majestic

Accessories



Single robe hook
AMJ061C



Double robe hook
AMJ071C



Towel ring
AMJ070C



Soap dish
AMJ0741C



Soap dish
AMJV1301



Hat & coat hook
AMJ062C



Magnetic soap holder
AMJ784C



Single arm
toilet roll holder
AMJ068C



Rotating shaving mirror
AMJ189C



Extending
shaving mirror
AMJ187C



Tumbler & toothpaste holder
AMJ073C



Toilet roll holder
AMJ067C



Toilet brush & holder
AMJ191C



Grab bar
AMJV1901C



18" Towel rail & brackets
AMJ06924C



Extending radiator towel rail
AMJ569EC



Towel rail - 550mm
AMJ06518C

Towel rail - 652mm
AMJ06524C

Towel rail - 805mm
AMJ06530C



Four arm stocking/flannel holder
AMJ0754C



Swing arm towel rail
AMJ0762C



Toilet brush & holder
AMJ291C



Double roll toilet holder
AMJ078C



Clean towel rack
with under rail
AMJV1754



Round swivel mirror & bracket
AMJ727C



Double towel rail
AMJ069A24C



Glass shelf & brackets
AMJ06622C



Clean towel rack
AMJV1751






Technical details.

Triton showers don't just look great, they work fabulously too. What's more, as each product is supplied with step by step instructions, they're also easy to fit. On the following pages you'll find further technical drawings and specifications, for you or your installer, to help you decide on the best model for you. From water systems to inlet centres or electrical requirements, we've listed everything you'll need to make the whole process as smooth and relaxing as one of our showers.


Shower Systems

This section will help you identify which plumbing system you have in your home and the types of showers best suited to it. Simply identify your water system and then follow the chart on pages 94/95 to see what your shower options are.


Mixer

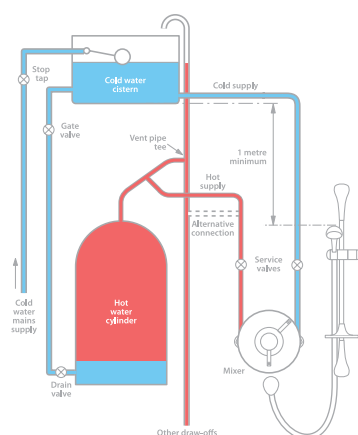

Typical Mixer Installation
Gravity Fed Low Pressure System

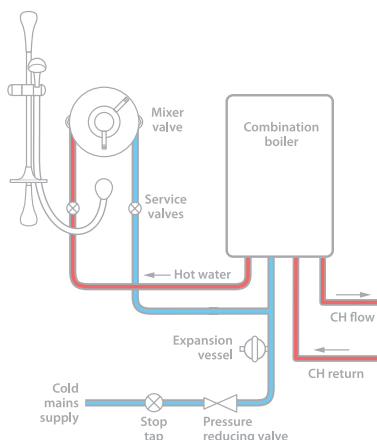


Typical Mixer Installation
Combi Boiler High Pressure System

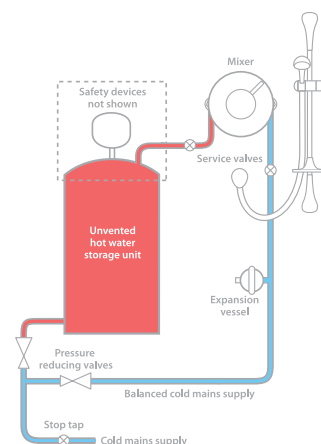


Typical Mixer Installation
Unvented High Pressure System

Electric showers

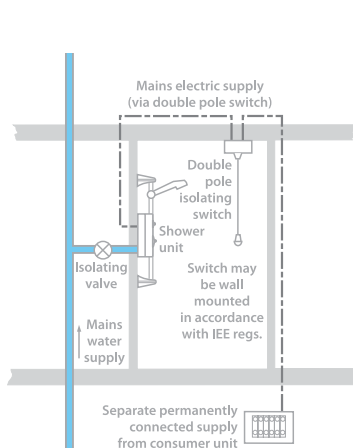


Typical Electric Installation
Cold Mains

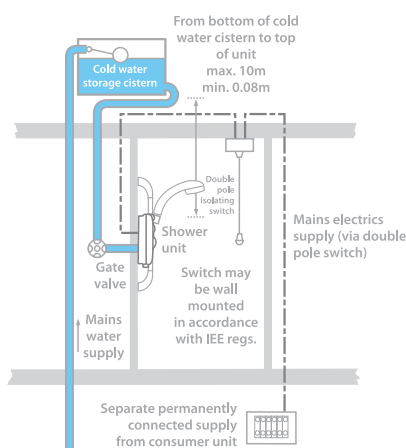


Typical Pumped Electric Installation
Cold Water Cistern


Power showers & pumps

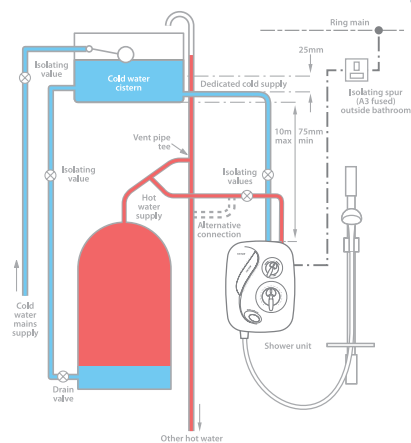

Typical Power Shower Installation
Gravity Fed Low Pressure System

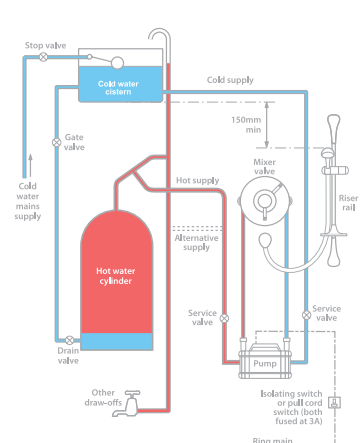

Typical Mixer with a Pump Installation
Gravity Fed Low Pressure System.
Suitable for Mixer Showers only

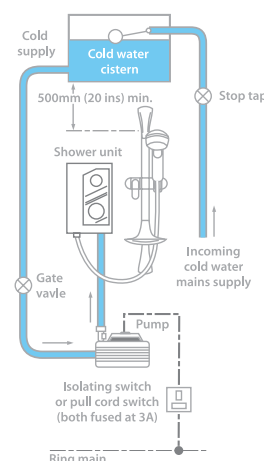

Typical Electric with a Pump Installation
Cold Water Cistern. Suitable
for Electric Showers only

Keeping it simple, keeping it running.

As well as making choosing our showers as straightforward as possible, we also offer a comprehensive service from pre-project planning to completion and beyond to make life a lot easier.

More availability, less delays

When you choose Triton you can trust our products to be readily available across the country through a nationwide network of around 3,500 outlets ensuring no delays on site.

Nationwide service engineers

Should you need it, we have a nationwide team of Customer Service Engineers to diagnose and solve problems on site. All with the reassurance of knowing that they have the skill and experience to remedy the situation in 99% of occasions.

All the help you need, all the way

Additional help is available through our experienced Technical Advisory Team who can guide you from planning through to installation. Support services are also provided to you by our team of National Specification Managers. And linking all of this with our Technical Service Engineers in the field is the Triton Specification Advisory Service ensuring that you have expert help when you need it, where you need it.

The details you need

Customer Service:

A dedicated team of 40 Customer Service Operators are on hand to give you all the help and advice you need:

Tel: +44 (0) 844 980 0750

Email: serviceenquiries@tritonshowers.co.uk

Website: www.tritonshowers.co.uk

Installer Hotline:

For immediate technical advice on installation, product suitability or to request additional fitting instructions:

Tel: +44 (0) 844 980 0730

Email: technical@tritonshowers.co.uk

Website: www.tritoninstallers.co.uk

Spare Parts:

We aim to despatch all orders received by 4.30pm (Monday to Friday) on the same day:

Tel: +44 (0) 844 980 0750

Email: spare_parts@tritonshowers.co.uk

Order on-line at www.tritoninstallers.co.uk




Shower specifications†

Satellites HP Mixer Unit

thermostatic mixer shower

| | |
|-------------------------------|---|
| Temperature Control | Thermostatic |
| Inlet Connections | 15mm push fit flexible hoses supplied with unit |
| Water Entry Points | Side exposed |
| Cable Entry Points | Pre-wired |
| Outlet Connection | 15mm push fit flexible hoses supplied with unit |
| Plumbing System Compatibility | High pressure only |
| Minimum Running Pressure/Flow | 1 Bar @ 8 l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 1 Bar | 9.6l/min |
| Mains Supply | 230V, 50Hz, current 5 amps |
| Approvals, Complies with | CE, IPX4 |
| Guarantee | 5 years |




| | |
|---------------|--|
| Finish | High pressure mixing unit and sirona panel |
| Code | SATMIXSIR-HP |

Satellites LP Mixer Unit

thermostatic mixer shower

| | |
|---------------------------------|---|
| Temperature Control | Thermostatic |
| Inlet Connections | 15mm push fit flexible hoses supplied with unit |
| Water Entry Points | Side external |
| Cable Entry Points | Pre-wired |
| Outlet Connection | 15mm push fit flexible hoses supplied with unit |
| Plumbing System Compatibility | Low pressure gravity |
| Minimum Head Pressure/Flow | 100mm |
| Maximum Head Pressure | 10m (1 Bar) |
| Maximum Static Pressure | 10m (1 Bar) |
| Open Outlet Flowrate at 0.1 Bar | 15.3l/min |
| Mains Supply | 230V, 50Hz, current 5 amps |
| Approvals, Complies with | BEAB, CE, IPX4 |
| Guarantee | 5 years |




| | |
|---------------|---|
| Finish | Low pressure mixing unit and sirona panel |
| Code | SATMIXSIR-LP |

Satellites Sirona Control Panel

thermostatic mixer shower

| Dip switch | Low pressure settings | High pressure settings |
|------------|-----------------------|--|
| 1 on | Run time set @10 mins | Run time set @10 mins |
| 1 off | Run time set @20 mins | Run time set @20 mins |
| 2 on | Temp range 35-41°C | Temp range 35-41°C |
| 2 off | Temp range 35-47°C | Temp range 35-47°C |
| 3 on | Eco mode set to on | Eco mode set to 'on' if dip 4 set to 'off' |
| 3 off | Full flow control | Full flow control if dip 4 set to 'off' |
| 4 on | Commissioning | Flow set at number 10 (combi flow) |
| 4 off | Normal operation | Normal operation |


Approvals, Complies with IPX4



| | |
|---------------|--|
| Finish | High pressure mixing unit and sirona panel |
| Code | SATMIXSIR-HP |
| Finish | Low pressure mixing unit and sirona panel |
| Code | SATMIXSIR-LP |

Satellites Metis Kit


- Suitable for both loft or cupboard installations

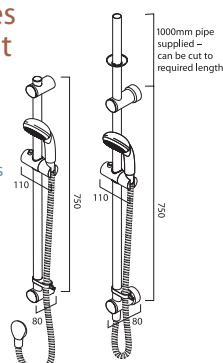

| Finish | Code |
|--------|-----------|
| Chrome | KITSATMET |

Satellites Mellena Kit


- Suitable for loft installations

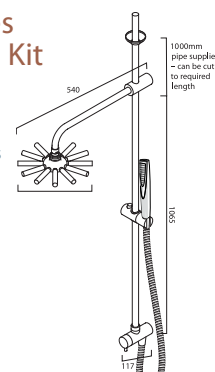

| Finish | Code |
|--------|-----------|
| Chrome | KITSATMEL |

Satellites Bellona Kit


- Suitable for loft installations

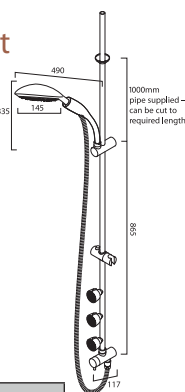

| Finish | Code |
|--------|-----------|
| Chrome | KITSATBEL |

Satellites Carlova Kit


- Suitable for both loft or cupboard installations

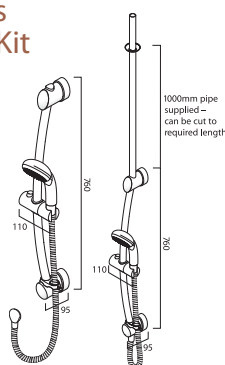

| Finish | Code |
|--------|-----------|
| Chrome | KITSATCAR |

Satellites Cyrene Kit

- Suitable for loft installations only
- Attaches to ceiling




| Finish | Code |
|--------|-----------|
| Chrome | KITSATCYR |

Aspirante & T300si

wireless electric shower

| | |
|-------------------------------|--|
| Temperature Control | Stabilised |
| Power Ratings | 9.5 kW, 10.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Bottom, back (right hand side of unit) |
| Cable Entry Points | Back, top (right hand side of unit) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Cold water only |
| Minimum Running Pressure/Flow | 1 Bar @ 8 l/min and 1.5 Bar @ 11 l/min for 10.5 kW |
| Maximum Static Pressure | 10 Bar |
| Surface Mounted Only | |
| Approvals, Complies with | BEAB, CE, BSI Kitemark |
| Guarantee | 2 years |




| T300si | | |
|--------------|---------|---------------|
| Finish | Power | Code |
| Satin/Chrome | 9.5 kW | SP309SIWLSA |
| Satin/Chrome | 10.5 kW | SP310SIWLSA |
| Aspirante | | |
| Finish | Power | Code |
| Chrome | 9.5 kW | ASP3CHR09SIWL |
| Chrome | 10.5 kW | ASP3CHR10SIWL |

Aspirante & T300si

remote electric shower

| | |
|-------------------------------|--|
| Temperature Control | Stabilised |
| Power Ratings | 8.5kW, 9.5 kW, 10.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Bottom, back (right hand side of unit) |
| Cable Entry Points | Back, top (right hand side of unit) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Cold water only |
| Minimum Running Pressure/Flow | 1 Bar @ 8 l/min and 1.5 Bar @ 11 l/min for 10.5 kW |
| Maximum Static Pressure | 10 Bar |
| Surface Mounted Only | |
| Approvals, Complies with | BEAB, CE, BSI Kitemark |
| Guarantee | 2 years |



| Aspirante | | |
|--------------|---------|-----------|
| Finish | Power | Code |
| All White | 8.5 kW | SP3048SI |
| All White | 9.5 kW | SP3049SI |
| All White | 10.5 kW | SP3041SI |
| White/Chrome | 8.5 kW | SP3008SI |
| White/Chrome | 9.5 kW | SP3009SI |
| White/Chrome | 10.5 kW | SP3001SI |
| T300si | | |
| Finish | Power | Code |
| Chrome | 8.5 kW | ASP3008SI |
| Chrome | 9.5 kW | ASP3009SI |
| Chrome | 10.5 kW | ASP3001SI |

† NOTE: Variations in pipework may affect flow rate figures at 0.1 bar


Shower specifications[†]

T150Z

thermostatic electric shower

| | |
|-------------------------------|--|
| Temperature Control | Thermostatic |
| Power Ratings | 8.5 kW, 9.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Top, bottom, back (right hand side unit) |
| Cable Entry Points | Top, bottom, back (right hand side unit) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Mains cold water only |
| Minimum Running Pressure/Flow | 0.5 Bar @ 8 l/min* |
| Maximum Static Pressure | 10 Bar |
| Surface Mounted Only | |
| Approvals, Complies with | BEAB, BEAB CARE, CE, BSI Kitemark |
| Guarantee | 2 years |

*Recommended minimum running pressure/flow for full performance. 1 Bar @ 8 l/min)




| Finish | Power | Code |
|--------------|--------|----------|
| White/Chrome | 8.5 kW | SPSG08WC |
| White/Chrome | 9.5 kW | SPSG09WC |

T150Z Pumped

thermostatic electric shower

| | |
|--------------------------|--|
| Temperature Control | Thermostatic pumped electric |
| Power Ratings | 8.5 kW, 9.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Top, bottom, back (right hand side unit) |
| Cable Entry Points | Top, bottom, back (right hand side unit) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Cold water cistern only |
| Minimum Head Pressure | 75mm |
| Maximum Head Pressure | 10m |
| Surface Mounted Only | |
| Approvals, Complies with | BEAB, BEAB CARE, CE, BSI Kitemark |
| Guarantee | 2 years |




| Finish | Power | Code |
|--------------|--------|------------|
| White/Chrome | 8.5 kW | SPSGPE08WC |
| White/Chrome | 9.5 kW | SPSGPE09WC |

Aspirante

electric shower

| | |
|-------------------------------|--|
| Temperature Control | Stabilised |
| Power Ratings | 8.5kW, 9.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Top, bottom, side bottom, back (left hand side unit) Bottom, side bottom, back (right hand side unit) |
| Cable Entry Points | Top, bottom, side bottom, back (left hand side unit) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Cold water only |
| Minimum Running Pressure/Flow | 1 Bar @ 8 l/min |
| Maximum Static Pressure | 10 Bar |
| Surface Mounted Only | |
| Approvals, Complies with | BEAB, CE, BSI Kitemark |
| Guarantee | 2 years |

To see all finishes and for further details please see page 22-25.




| Finish | Power | Code |
|---------------|--------|--------------|
| Black Gloss | 8.5 kW | ASP08GSBLK |
| Black Gloss | 9.5 kW | ASP09GSBLK |
| Gun Metal | 8.5 kW | ASP08GUNMTL |
| Gun Metal | 9.5 kW | ASP09GUNMTL |
| Brushed Steel | 8.5 kW | ASP08BRSTL |
| Brushed Steel | 9.5 kW | ASP09BRSTL |
| Black Pearl | 8.5 kW | ASP08TLPLBLK |
| Black Pearl | 9.5 kW | ASP09TLPLBLK |
| White Gloss | 8.5 kW | ASP08GSWHT |
| White Gloss | 9.5 kW | ASP09GSWHT |
| Riviera Sand | 8.5 kW | ASP08TLRSD |
| Riviera Sand | 9.5 kW | ASP09TLRSD |

Topaz T100si

thermostatic electric shower

| | |
|-------------------------------|---|
| Temperature Control | Thermostatic |
| Power Ratings | 8.5 kW, 9.5 kW, 10.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Top, bottom, back (right hand side unit) |
| Cable Entry Points | Top, bottom, back (right hand side unit) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Cold water only |
| Minimum Running Pressure/Flow | 1 Bar @ 8 l/min and 1.5 Bar @ 11 l/min for 10.5 kW |
| Maximum Static Pressure | 10 Bar |
| Surface Mounted Only | |
| Approvals, Complies with | BEAB, CE, BSI Kitemark |
| Guarantee | 2 years |




| Finish | Power | Code |
|--------|---------|----------|
| White | 8.5 kW | SP1148SI |
| White | 9.5 kW | SP1149SI |
| White | 10.5 kW | SP1141SI |

Aspirante Topaz

thermostatic electric shower

| | |
|-------------------------------|---|
| Temperature Control | Thermostatic |
| Power Ratings | 9.5 kW, 10.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Top, bottom, back (right hand side unit) |
| Cable Entry Points | Top, bottom, back (right hand side unit) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Cold water only |
| Minimum Running Pressure/Flow | 1 Bar @ 8 l/min and 1.5 Bar @ 11 l/min for 10.5 kW |
| Maximum Static Pressure | 10 Bar |
| Surface Mounted Only | |
| Approvals, Complies with | BEAB, CE, BSI Kitemark |
| Guarantee | 2 years |




| Finish | Power | Code |
|--------|---------|-----------|
| Chrome | 9.5 kW | ASP1149SI |
| Chrome | 10.5 kW | ASP1141SI |

Topaz T80si

thermostatic electric shower

| | |
|-------------------------------|---|
| Temperature Control | Thermostatic |
| Power Ratings | 8.5 kW, 9.5 kW, 10.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Top, bottom, back (right hand side unit) |
| Cable Entry Points | Top, bottom, back (right hand side unit) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Cold water only |
| Minimum Running Pressure/Flow | 1 Bar @ 8 l/min and 1.5 Bar @ 11 l/min for 10.5 kW |
| Maximum Static Pressure | 10 Bar |
| Surface Mounted Only | |
| Approvals, Complies with | BEAB, CE, BSI Kitemark |
| Guarantee | 2 years |




| Finish | Power | Code |
|--------------|---------|----------|
| White/Chrome | 8.5 kW | SP8148SI |
| White/Chrome | 9.5 kW | SP8149SI |
| White/Chrome | 10.5 kW | SP8141SI |

Aspirante xr

electric shower

| | |
|-------------------------------|---|
| Temperature Control | Stabilised |
| Power Ratings | 9.5 kW, 10.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Bottom, back (right hand side unit) |
| Cable Entry Points | Top, back (right hand side unit) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Cold water only |
| Minimum Running Pressure/Flow | 1 Bar @ 8 l/min and 1.5 Bar @ 11 l/min for 10.5 kW |
| Maximum Static Pressure | 10 Bar |
| Surface Mounted Only | |
| Approvals, Complies with | BEAB, CE, BSI Kitemark |
| Guarantee | 2 years |




| Finish | Power | Code |
|--------------|---------|-----------|
| Satin/Chrome | 9.5 kW | ASP1009XR |
| Satin/Chrome | 10.5 kW | ASP1001XR |

T100xr

electric shower

| | |
|-------------------------------|---|
| Temperature Control | Stabilised |
| Power Ratings | 8.5 kW, 9.5 kW, 10.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Bottom, back (right hand side unit) |
| Cable Entry Points | Top, back (right hand side unit) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Cold water only |
| Minimum Running Pressure/Flow | 1 Bar @ 8 l/min and 1.5 Bar @ 11 l/min for 10.5 kW |
| Maximum Static Pressure | 10 Bar |
| Surface Mounted Only | |
| Approvals, Complies with | BEAB, CE, BSI Kitemark |
| Guarantee | 2 years |

Instatrim available separately




| Finish | Power | Code |
|--------------|---------|----------|
| White/Chrome | 8.5 kW | SP1008XR |
| White/Chrome | 9.5 kW | SP1009XR |
| White/Chrome | 10.5 kW | SP1001XR |

T80Z Fast-Fit electric shower

| | |
|---|---|
| Temperature Control | Stabilised |
| Power Ratings | 7.5 kW, 8.5 kW, 9.5 kW, 10.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Top, bottom, side bottom, back (left hand side unit) Top, bottom, side bottom, back (right hand side unit) |
| Cable Entry Points | Top, bottom, back (left hand side unit) Top, bottom, back (right hand side unit) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Cold water only |
| Minimum Running Pressure/Flow for full performance* | 1.0 Bar @ 8 l/min 1.5 Bar @ 11 l/min for 10.5 kW* |
| Maximum Static Pressure | 10 Bar |
| Surface Mounted Only | |
| Approvals, Complies with | BEAB, CE, BSI Kitemark |
| Guarantee | 2 years |

To see all finishes and for further details please see page 28-29.
*At running pressure/flow 0.7 Bar at 8 l/min (1.2 Bar at 11 l/min for 10.5kW)
the shower will continue to operate at a reduced performance.

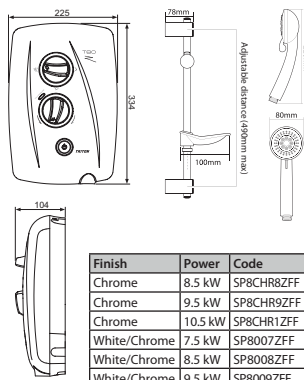


| Finish | Power | Code |
|--------------|---------|-------------|
| Chrome | 8.5 kW | SP8CHR8ZFF |
| Chrome | 9.5 kW | SP8CHR9ZFF |
| Chrome | 10.5 kW | SP8CHR10ZFF |
| White/Chrome | 7.5 kW | SP8007ZFF |
| White/Chrome | 8.5 kW | SP8008ZFF |
| White/Chrome | 9.5 kW | SP8009ZFF |
| White/Chrome | 10.5 kW | SP8010ZFF |
| White/Chrome | 8.5 kW | ECO8008ZFF |

T80Z Slimline electric shower

| | |
|---|--|
| Temperature Control | Stabilised |
| Power Ratings | 8.5 kW, 9.5 kW, 10.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Top, bottom, side bottom, back (left hand side of unit) Bottom, side bottom, back (right hand side of unit) |
| Cable Entry Points | Top, bottom, back (left hand side of unit) Bottom, back (right hand side of unit) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Cold water only |
| Minimum Running Pressure/Flow for full performance* | 1.0 Bar @ 8 l/min 1.5 Bar @ 11 l/min for 10.5 kW |
| Maximum Static Pressure | 10 Bar |
| Surface Mounted Only | |
| Approvals, Complies with | BEAB, CE, BSI Kitemark |
| Guarantee | 2 years |

To see all finishes and for further details please see page 30-31.
*At running pressure/flow 0.7 Bar at 8 l/min (1.2 Bar at 11 l/min for 10.5kW)
the shower will continue to operate at a reduced performance.




| Finish | Power | Code |
|--------------|---------|--------------|
| Chrome | 9.5 kW | SP8CHR9ZSLM |
| Chrome | 10.5 kW | SP8CHR10ZSLM |
| White/Chrome | 8.5 kW | SP8008ZSLM |
| White/Chrome | 9.5 kW | SP8009ZSLM |
| White/Chrome | 10.5 kW | SP8010ZSLM |
| White/Chrome | 8.5 kW | ECO8008ZSLM |

T80Z Thermostatic electric shower

| | |
|---|--|
| Temperature Control | Thermostatic |
| Power Ratings | 8.5 kW, 9.5 kW, 10.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Top, bottom, side bottom, back (left hand side of unit) Bottom, side bottom, back (right hand side of unit) |
| Cable Entry Points | Top, bottom, back (left hand side of unit) Bottom, back (right hand side of unit) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Cold water only |
| Minimum Running Pressure/Flow for full performance* | 1.0 Bar @ 8 l/min 1.5 Bar @ 11 l/min for 10.5 kW |
| Maximum Static Pressure | 10 Bar |
| Surface Mounted Only | |
| Approvals, Complies with | BEAB, CE, BSI Kitemark |
| Guarantee | 2 years |

To see all finishes and for further details please see page 32-33.
*At running pressure/flow 0.7 Bar at 8 l/min (1.2 Bar at 11 l/min for 10.5kW)
the shower will continue to operate at a reduced performance.




| Finish | Power | Code |
|--------------|---------|--------------|
| Chrome | 9.5 kW | SP8CHR9ZTHM |
| Chrome | 10.5 kW | SP8CHR10ZTHM |
| White/Chrome | 8.5 kW | SP8008ZTHM |
| White/Chrome | 9.5 kW | SP8009ZTHM |

T70Z electric shower

| | |
|-------------------------------|--|
| Temperature Control | Stabilised |
| Power Ratings | 7.5 kW, 8.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Top, bottom, back (left hand side unit) Bottom, back (right hand side unit) |
| Cable Entry Points | Top, bottom, back (left or right hand side unit*) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Cold water only |
| Minimum Running Pressure/Flow | 1 Bar @ 8 l/min** |
| Maximum Static Pressure | 10 Bar |
| Surface Mounted Only | |
| Approvals, Complies with | BEAB, CE, BSI Kitemark |
| Guarantee | 2 years |


*At running pressure/flow 0.7 Bar at 8 l/min the shower will continue to operate at a reduced performance.
**RHS is achieved using the Z Uni-fit Kit.



| Finish | Power | Code |
|--------|--------|---------|
| White | 7.5 kW | SP7007Z |
| White | 8.5 kW | SP7008Z |

T90xr pumped electric shower

| | |
|--------------------------|--|
| Temperature Control | Pumped Electric Stabilised |
| Power Ratings | 8.5 kW, 9.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Top, bottom, back (left hand side of unit) |
| Cable Entry Points | Top, bottom, back (left hand side of unit) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Cold water cistern only |
| Minimum Head Pressure | 75mm |
| Maximum Head Pressure | 10m |
| Surface Mounted Only | |
| Approvals, Complies with | BEAB, CE, BSI Kitemark |
| Guarantee | 2 years |




| Finish | Power | Code |
|--------------|--------|----------|
| White/Chrome | 8.5 kW | SP9008SI |
| White/Chrome | 9.5 kW | SP9009SI |

Safeguard Care thermostatic electric shower

| | |
|-------------------------------|---|
| Temperature Control | Thermostatic |
| Power Ratings | 8.5 kW, 9.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Top, bottom, back (right hand side of unit) |
| Cable Entry Points | Top, bottom, back (right hand side of unit) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Mains cold water only |
| Compatibility | |
| Minimum Running Pressure/Flow | 0.5 Bar at 8l/min* |
| Maximum Static Pressure | 10 Bar |
| Surface Mounted Only | |
| Approvals | BEAB, BEAB CARE, RNIB, CE, BSI Kitemark, WRAS |
| Guarantee | 2 years |


*Recommended minimum running pressure/flow for full performance 1 Bar @ 8 l/min



| Finish | Power | Code |
|--------------|--------|------------|
| White/Chrome | 8.5 kW | C100SG08WC |
| White/Chrome | 9.5 kW | C100SG09WC |

Safeguard Pumped Care thermostatic electric shower


| | |
|-----------------------|---|
| Temperature Control | Thermostatic pumped electric |
| Power Ratings | 8.5 kW, 9.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Top, bottom, back (right hand side of unit) |
| Cable Entry Points | Top, bottom, back (right hand side of unit) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Cold water cistern only |
| Compatibility | |
| Minimum Head Pressure | 75mm |
| Maximum Head Pressure | 10m |
| Surface Mounted Only | |
| Approvals | BEAB, BEAB CARE, RNIB, CE, BSI Kitemark |
| Guarantee | 2 years |



| Finish | Power | Code |
|--------------|--------|-----------|
| White/Chrome | 8.5 kW | CSGPE08WC |
| White/Chrome | 9.5 kW | CSGPE09WC |

Elina TMV3 Exposed Concentric thermostatic mixer shower


| | |
|--|------------------------|
| Temperature Control | Thermostatic |
| Plumbing System | Low and high pressure |
| Compatibility | |
| Inlet Connections | 15mm compression |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP top or bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 8.5l/min |
| Maximum Flow with Flow Limiters Fitted | 12l/min |
| Pipe Inlet Centres | 150-155mm |
| Approvals, Complies with | TMV3, WRAS |
| Guarantee | 3 years |



| Finish | Code |
|--------|-------------|
| Chrome | ELITMV3EXCM |

Unichrome Thames Built-In Sequential thermostatic mixer shower


| | |
|--|-------------------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 15mm compression to flat face union |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 7l/min |
| Built-In depth | 55mm minimum |
| Maximum Flow with Flow Limiters Fitted | 12l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |

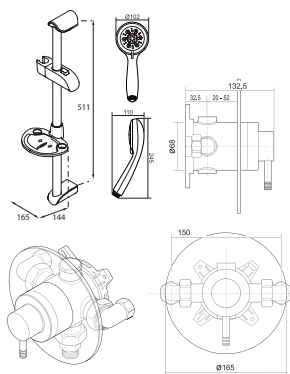

| Finish | Code |
|--------|------------|
| Chrome | UNTHHTBTSM |

Unichrome Thames Exposed Single Lever thermostatic mixer shower


| | |
|---------------------------------------|---|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | High pressure or low pressure with a pump |
| Inlet Connections | 15mm compression |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.5 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.5 Bar | 7l/min |
| Maximum Flow with Flow Limiter Fitted | 8l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | BS EN 1111, 1287 |
| Guarantee | 5 years |

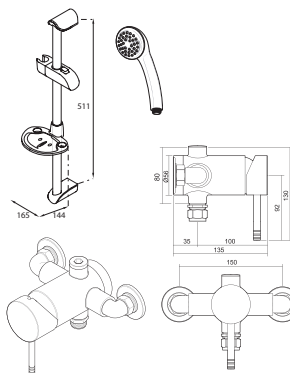

| Finish | Code |
|--------|-----------|
| Chrome | UNTHTEXSL |

Unichrome Thames Exposed Mini Concentric thermostatic mixer shower


| | |
|--|------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 15mm compression |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 4.3l/min |
| Maximum Flow with Flow Limiters Fitted | 8l/min |
| Pipe Inlet Centres | 110 or 150mm |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |

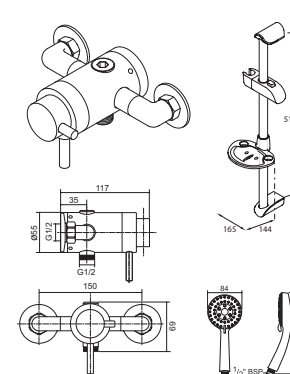

| Finish | Code |
|--------|-----------|
| Chrome | UNTHXCMMN |

Unichrome Thames Built-In Mini Sequential thermostatic mixer shower


| | |
|--|------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 15mm compression |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 3.9l/min |
| Built-In depth | 50-55mm minimum |
| Maximum Flow with Flow Limiters Fitted | 8l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |

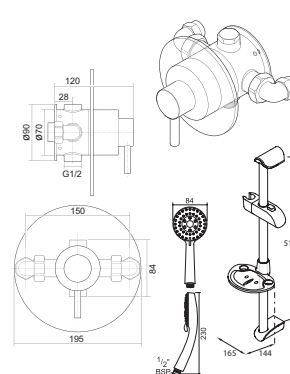

| Finish | Code |
|--------|-------------|
| Chrome | UNTHHTBTSMN |

Unichrome Thames Exposed Sequential thermostatic mixer shower


| | |
|--|------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 15mm compression |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 7l/min |
| Maximum Flow with Flow Limiters Fitted | 12l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |

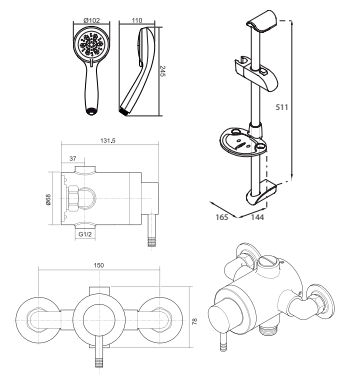

| Finish | Code |
|--------|-----------|
| Chrome | UNTHTEXSM |

Unichrome Thames Built-In Mini Concentric thermostatic mixer shower


| | |
|--|------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 15mm compression |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 4.3l/min |
| Built-in depth | 50-55mm minimum |
| Maximum Flow with Flow Limiters Fitted | 8l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |

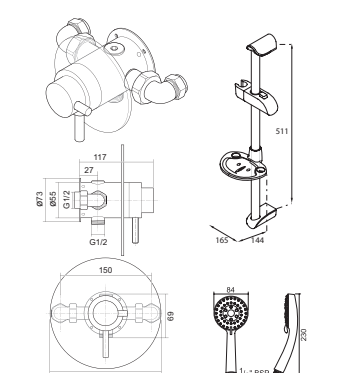

| Finish | Code |
|--------|------------|
| Chrome | UNTHBTCMMN |

Unichrome Thames Exposed Mini Sequential thermostatic mixer shower


| | |
|--|------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 15mm compression |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 3.9l/min |
| Maximum Flow with Flow Limiters Fitted | 8l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |

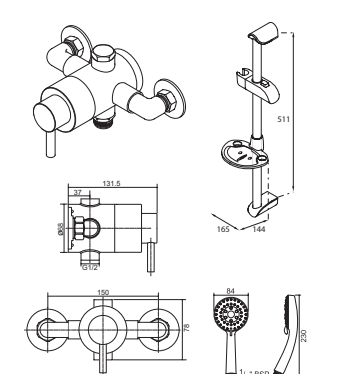

| Finish | Code |
|--------|------------|
| Chrome | UNTHTEXSMN |

Unichrome Mersey Exposed Mini Sequential thermostatic mixer shower

| | |
|---------------------------------------|------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 15mm compression |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 3.9l/min |
| Maximum Flow with Flow Limiter Fitted | 8l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |

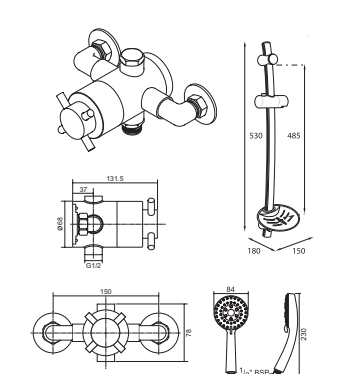


| Finish | Code |
|--------|-------------|
| Chrome | UNMETHEXSMN |

Shower specifications[†]

Unichrome Mersey Built-in Mini Sequential thermostatic mixer shower


| | |
|---------------------------------------|------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 15mm compression |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 3.9l/min |
| Built-in depth | 50-55mm minimum |
| Maximum Flow with Flow Limiter Fitted | 8l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |

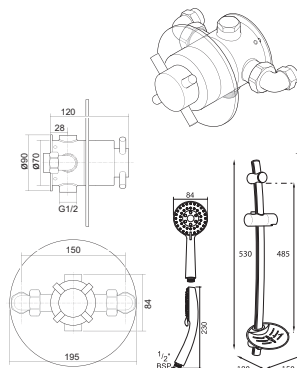

| Finish | Code |
|--------|-------------|
| Chrome | UNMETHBTSMN |

Unichrome Mersey Built-in Sequential thermostatic mixer shower


| | |
|---------------------------------------|------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 15mm compression |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 4.8l/min |
| Built-in depth | 55mm minimum |
| Maximum Flow with Flow Limiter Fitted | 8l/min |
| Pipe Inlet Centres | 170mm |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |

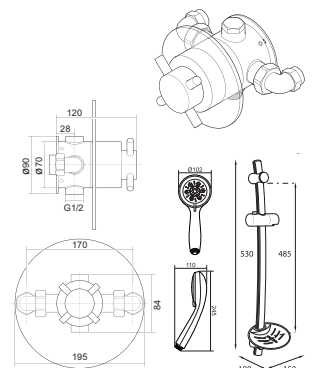

| Finish | Code |
|--------|------------|
| Chrome | UNMETHBTSM |

Unichrome Mersey Exposed Sequential thermostatic mixer shower


| | |
|---------------------------------------|------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 15mm compression |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 4.8l/min |
| Maximum Flow with Flow Limiter Fitted | 8l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |

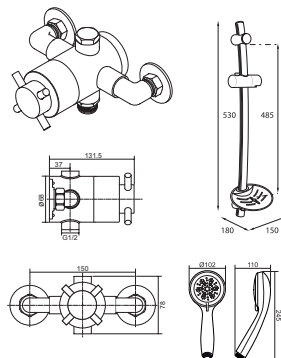

| Finish | Code |
|--------|------------|
| Chrome | UNMETHEXSM |

Unichrome Mersey Dual Control thermostatic mixer shower


| | |
|---------------------------------------|------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 3/4" BSP |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP top |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 4.9l/min |
| Built-in depth | 65mm minimum |
| Maximum Flow with Flow Limiter Fitted | 8l/min |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |

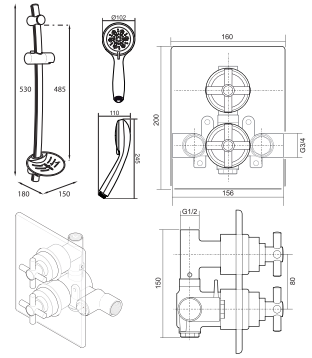

| Finish | Code |
|--------|----------|
| Chrome | UNMEDCMX |

Unichrome Mersey Exposed Concentric thermostatic mixer shower


| | |
|---------------------------------------|------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 15mm compression |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 5.5l/min |
| Maximum Flow with Flow Limiter Fitted | 8l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |



| Finish | Code |
|--------|----------|
| Chrome | UNMEEXCM |

Unichrome Mersey Built-in Concentric thermostatic mixer shower


| | |
|---------------------------------------|-------------------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 15mm compression to flat face union |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 5.5l/min |
| Built-in depth | 55mm minimum |
| Maximum Flow with Flow Limiter Fitted | 8l/min |
| Pipe Inlet Centres | 170mm |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |



| Finish | Code |
|--------|----------|
| Chrome | UNMEBTCM |

Unichrome Mersey Exposed Concentric with Fixed Head thermostatic mixer shower


| | |
|---------------------------------------|------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 15mm compression |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP top |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 5.5l/min |
| Maximum Flow with Flow Limiter Fitted | 8l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |

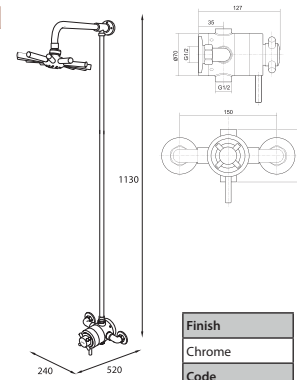

| Finish | Code |
|--------|------------|
| Chrome | UNMEEXCMFH |

Unichrome Mersey Built-in Concentric with Fixed Head thermostatic mixer shower

| | |
|---------------------------------------|-------------------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 15mm compression to flat face union |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP top |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 5.5l/min |
| Built-in depth | 55mm minimum |
| Maximum Flow with Flow Limiter Fitted | 8l/min |
| Pipe Inlet Centres | 170mm |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |




| Finish | Code |
|--------|------------|
| Chrome | UNMEBTCMFH |

Unichrome Mersey Bar Mixer with Diverter

thermostatic mixer shower

| | |
|--|----------------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 1/2" BSP to 3/4" flat face union |
| Water Entry Points | Back |
| Outlet Connection | 1/2" BSP top and bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 5.7l/min |
| Maximum Flow with Flow Limiters Fitted | 12l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |

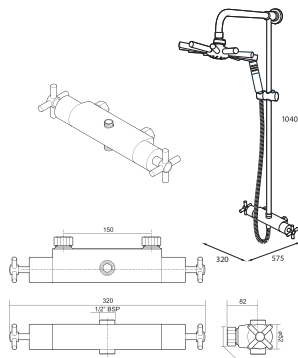


| Finish | Code |
|--------|-------------|
| Chrome | UNMETHBMDIV |

Unichrome Mersey Bar Mixer with Fixed Head

thermostatic mixer shower

| | |
|--|----------------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 1/2" BSP to 3/4" flat face union |
| Water Entry Points | Back |
| Outlet Connection | 1/2" BSP top |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 5.2l/min |
| Maximum Flow with Flow Limiters Fitted | 12l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | TMV2, WRAS |
| Guarantee | 5 years |

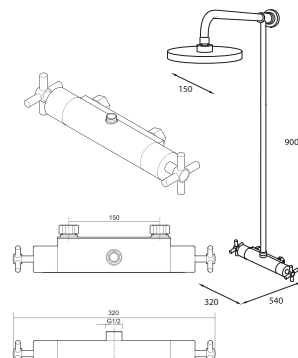


| Finish | Code |
|--------|------------|
| Chrome | UNMETHBMFH |

Unichrome Dart Built-In with Fixed Head

thermostatic mixer shower

| | |
|--|------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 15mm compression |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP top |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 5.5l/min |
| Built-In depth | 55mm minimum |
| Maximum Flow with Flow Limiters Fitted | 12l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |

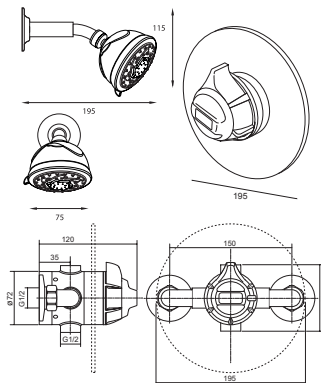


| Finish | Code |
|--------|--------------|
| Chrome | UNDATHCMBTFH |

Unichrome Nene Bar Mixer with Diverter & Body Jets

thermostatic mixer shower

| | |
|-------------------------------|---|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | High pressure or low pressure with a pump |
| Inlet Connections | 1/2" BSP to 3/4" flat face union |
| Water Entry Points | Back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 1 Bar | 11l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | BS EN 1111, 1287 |
| Guarantee | 5 years |

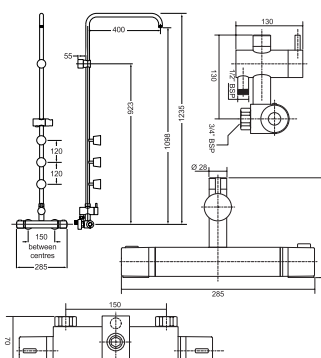


| Finish | Code |
|--------|-------------|
| Chrome | UNNETHBMDIV |

Unichrome Mersey Bar Mixer

thermostatic mixer shower

| | |
|--|----------------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 1/2" BSP to 3/4" flat face union |
| Water Entry Points | Back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 5.3l/min |
| Maximum Flow with Flow Limiters Fitted | 12l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | TMV2, WRAS |
| Guarantee | 5 years |

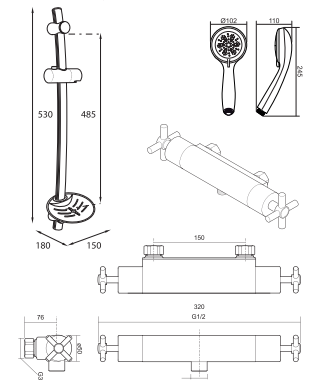


| Finish | Code |
|--------|----------|
| Chrome | UNMETHBM |

Unichrome Dart

thermostatic mixer shower

| | |
|--|-------------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 15mm compression |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 5.5l/min |
| Built-In depth | 55mm minimum |
| Maximum Flow with Flow Limiters Fitted | 12l/min (9l/min for Dart Eco) |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | BS EN 1111, 1287, WRAS |
| Guarantee | 5 years |

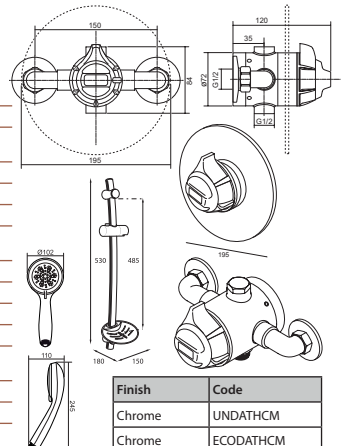


| Finish | Code |
|--------|-----------|
| Chrome | UNDATHCM |
| Chrome | ECODATHCM |

Unichrome Nene Cool Touch Bar Mixer

thermostatic mixer shower

| | |
|---------------------------------|----------------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 1/2" BSP to 3/4" flat face union |
| Water Entry Points | Back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 3l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | BS EN 1111, 1287 |
| Guarantee | 5 years |

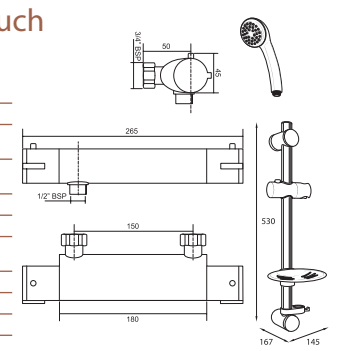


| Finish | Code |
|--------|------------|
| Chrome | UNNETHBMCT |

Unichrome Tyne Bar Mixer

thermostatic mixer shower

| | |
|--|----------------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 1/2" BSP to 3/4" flat face union |
| Water Entry Points | Back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 6.3l/min |
| Maximum Flow with Flow Limiters Fitted | 12l/min |
| Pipe Inlet Centres | 150mm |
| Approvals, Complies with | BS EN 1111, 1287 |
| Guarantee | 5 years |

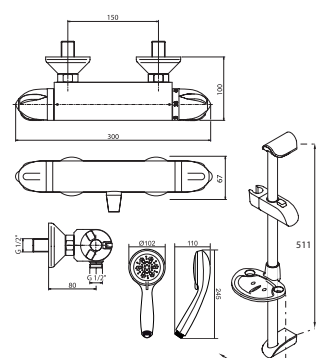


| Finish | Code |
|--------|----------|
| Chrome | UNTYTHBM |

Shower specifications[†]

Unichrome Avon Dual Control thermostatic mixer shower


| | |
|---------------------------------------|-----------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 3/4" BSP |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 3/4" BSP top |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 4.9l/min |
| Maximum Flow with Flow Limiter Fitted | 12l/min |
| Built-In depth | 65mm minimum |
| Approvals, Complies with | BS EN 1111, 1287 |
| Guarantee | 5 years |



| Finish | Code |
|--------|----------|
| Chrome | UNAVBACH |

Unichrome Aire Bar Mixer thermostatic mixer shower


| | |
|---------------------------------------|----------------------------------|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 1/2" BSP to 3/4" flat face union |
| Water Entry Points | Back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 5.3l/min |
| Maximum Flow with Flow Limiter Fitted | 8l/min |
| Pipe Inlet Centres | 130-170mm |
| Approvals, Complies with | BS EN 1111, 1287 |
| Guarantee | 5 years |



| Finish | Code |
|--------|----------|
| Chrome | UNAITHBM |

Unichrome Aire Bath Shower Mixer thermostatic mixer shower


| | |
|---------------------------------------|---|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | High pressure or low pressure with a pump |
| Inlet Connections | 3/4" BSP |
| Water Entry Points | Rising |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 1 Bar @ 8l/min or 0.1 Bar (with a pump) |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 1 Bar | 15.5l/min |
| Maximum Flow with Flow Limiter Fitted | 8l/min |
| Pipe Inlet Centres | 178mm |
| Approvals, Complies with | BS EN 1111 |
| Guarantee | 5 years |



| Finish | Code |
|--------|------------|
| Chrome | UNAITHBSM |
| Chrome | UNAITHBSMR |

Unichrome Dove Bar Mixer with Diverter thermostatic mixer shower


| | |
|---------------------------------|---|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | High pressure or low pressure with a pump |
| Inlet Connections | 1/2" BSP to 3/4" flat face union |
| Water Entry Points | Back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.5 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.5 Bar | 5l/min |
| Pipe Inlet Centres | 130-170mm |
| Approvals, Complies with | BS EN 1111, 1287 |
| Guarantee | 5 years |

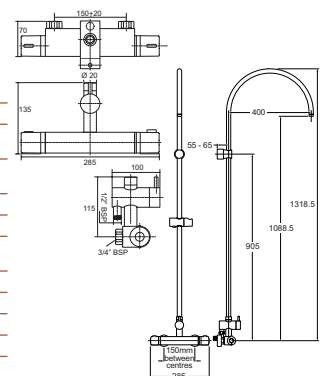

| Finish | Code |
|--------|-------------|
| Chrome | UNDOTHBMDIV |

Unichrome Dove Bar Mixer thermostatic mixer shower


| | |
|---------------------------------------|--|
| Temperature Control | Thermostatic |
| Plumbing System Compatibility | Low and high pressure |
| Inlet Connections | 1/2" BSP to 3/4" flat face union |
| Water Entry Points | Back |
| Outlet Connection | 1/2" BSP bottom |
| Minimum Running Pressure/Flow | 0.1 Bar @ 8l/min |
| Maximum Running Pressure | 5 Bar |
| Maximum Static Pressure | 10 Bar |
| Open Outlet Flowrate at 0.1 Bar | 3l/min |
| Maximum Flow with Flow Limiter Fitted | 8l/min (6l/min for Dart Eco Bar Mixer) |
| Pipe Inlet Centres | 130-170mm |
| Approvals, Complies with | WRAS, TMV2 |
| Guarantee | 5 years |



| Finish | Code |
|--------|-----------|
| Chrome | UNDOTHBM |
| Chrome | ECODOTHBM |

Aspirante thermostatic power shower


| | |
|-------------------------------|------------------------|
| Temperature Control | Thermostatic |
| Voltage 230/240V A.C. | Rating 150W nominal |
| Plumbing System Compatibility | Low pressure gravity |
| Inlet Connections | 15mm push fit |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP |
| Minimum Head Pressure | 75mm |
| Maximum Head Pressure | 10m |
| Maximum Open Outlet Flowrate | 14l/min |
| Approvals, Complies with | BEAB, CE, BSI Kitemark |
| Guarantee | 1 year |



| Finish | Code |
|--------|------------|
| Chrome | ASP2000THM |

AS2000XT thermostatic power shower


| | |
|-------------------------------|------------------------|
| Temperature Control | Thermostatic |
| Voltage 230/240V A.C. | Rating 150W nominal |
| Plumbing System Compatibility | Low pressure gravity |
| Inlet Connections | 15mm push fit |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP |
| Minimum Head Pressure | 75mm |
| Maximum Head Pressure | 10m |
| Maximum Open Outlet Flowrate | 14l/min |
| Approvals, Complies with | BEAB, CE, BSI Kitemark |
| Guarantee | 1 year |



| Finish | Code |
|--------------|-------------|
| White/Chrome | TAS2000XTHM |

AS2000X manual power shower

| | |
|-------------------------------|------------------------|
| Temperature Control | Manual |
| Voltage 230/240V A.C. | Rating 150W nominal |
| Plumbing System Compatibility | Low pressure gravity |
| Inlet Connections | 15mm push fit |
| Water Entry Points | Rising, falling, back |
| Outlet Connection | 1/2" BSP |
| Minimum Head Pressure | 75mm |
| Maximum Head Pressure | 10m |
| Maximum Open Outlet Flowrate | 14l/min |
| Approvals, Complies with | BEAB, CE, BSI Kitemark |
| Guarantee | 1 year |

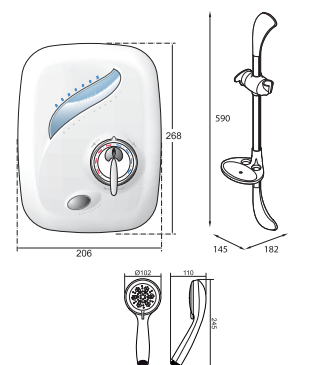


| Finish | Code |
|--------------|-------------|
| White/Chrome | TAS2000XMAN |

Metlex accessories dimensions

T40i

wall mounted booster pump

| | |
|-------------------------------|---------------------------|
| Voltage 230/240V AC. | Rating 590W nominal |
| Plumbing System Compatibility | Gravity hot and cold only |
| Inlet Connections | 1/2" BSP |
| Water Entry Points | Bottom |
| Outlet Connection | 1/2" BSP |
| Minimum Head Pressure | 230mm |
| Maximum Head Pressure | 10m |
| Approvals, Complies with | BEAB, CE |
| Guarantee | 1 year |




Code
T040004I

T550i

twin impeller pump

| | |
|---|----------------------|
| Voltage 230/240V AC. | Rating 590W nominal |
| Plumbing System Compatibility | Low pressure gravity |
| Inlet Connections | 15mm push fit |
| Water Entry Points | Side |
| Outlet Connection | 15mm push fit |
| Minimum Head Pressure | 150mm |
| Maximum Head Pressure | 10m |
| Maximum Open Outlet Flowrate at 1.2 Bar | 16l/min |
| Approvals, Complies with | BEAB, CE |
| Guarantee | 1 year |




Code
T550I00M

T450i

single impeller pump

| | |
|-------------------------------|---------------------------|
| Voltage 230/240V AC. | Rating 590W nominal |
| Plumbing System Compatibility | Gravity hot and cold only |
| Inlet Connections | 1/2" BSP |
| Water Entry Points | Bottom |
| Outlet Connection | 1/2" BSP |
| Minimum Head Pressure | 230mm |
| Maximum Head Pressure | 10m |
| Approvals, Complies with | BEAB, CE |
| Guarantee | 1 year |



Code
T450I00M

BUCKINGHAM

Description

Dimensions (mm)
(H x W x D)

Code

| | | |
|---|-------------|----------|
| Corner cabinet single mirror door | 460x255x255 | ABU148 |
| Linen bin | 420x400x300 | ABU0003 |
| Double sliding mirror door cabinet (one locking door) | 330x560x145 | ABU2213D |
| Locking medicine cabinet | 380x280x150 | ABU001LM |
| Double sliding mirror door cabinet | 325x560x130 | ABU2215 |
| Double mirror door cabinet | 380x560x150 | ABU512B |
| Single mirror door cabinet | 380x280x150 | ABU510B |

CARLTON

| | | |
|--|----------------|------------|
| Chromium plated bend + connecting spigots | 125 x 25 x 125 | ACTRB991 |
| Pair of shower rail flanges + cover plates | 50 x 50 x 18 | ACTRF981 |
| Curtain rings | 72 x 40 x 01 | ACT19112 |
| Shower rail | 25 x 1220 x 25 | ACTR481 |
| Shower rail | 25 x 1830 x 25 | ACTR721 |
| Ceiling support | 58 x 58 x 490 | ACTV1931 |
| Grab bar 25mm dia | 58 x 336 x 95 | ACT169AC |
| Angled grab bar | 191 x 330 x 83 | ACT171C |
| Single towel rail | 58 x 520 x 64 | ACT26918C |
| Single towel rail | 58 x 670 x 64 | ACT26924C |
| Double towel rail | 64 x 658 x 160 | ACT269A24C |
| Toilet roll holder | 35 x 140 x 80 | ACT267C |
| Tiered clean towel rack | TBC | ACTV3933 |
| Toilet roll holder | 25 x 140 x 80 | ACT267BC |
| Toilet roll holder - locking wood | 25 x 140 x 80 | ACT267BLC |
| Toilet roll holder - white | 25 x 140 x 80 | ACT267PW |

MAJESTIC

| | | |
|---|-----------------------|------------|
| Single robe hook | 50 x 40 x 35 | AMJ061C |
| Hat and coat hook | 120 x 40 x 50 | AMJ062C |
| Glass tumbler and toothbrush holder | 50 x 100 x 80 | AMJ073C |
| Double robe hook | 50 x 38 x 35 | AMJ071C |
| Toilet roll holder - single arm | 45 x 145 x 92 | AMJ068C |
| Extending shaving mirror | 460 x 200 x 450 | AMJ187C |
| Double towel rail | 50 x 580 x 150 | AMJ069A24C |
| Towel rack with under-rail | 135 x 674 x 238 | AMJV1754 |
| Towel ring | 165 x 160 x 30 | AMJ070C |
| Stainless steel toilet brush and holder | 410 x 97 x 97 | AMJ291C |
| Soap dish | 50 x 143 x 107 | AMJ074C |
| Acrylic soap dish | 50 x 143 x 107 | AMJ0741C |
| Four arm stocking/flannel rail | 78 x 165 x 36 | AMJ0754C |
| Rotating shaving mirror | 223 x 203 x 134 | AMJ189C |
| Mirror | 455 x 520 x 60 | AMJ727C |
| Extending radiator towel rail | 75 x 620 x 1200 x 145 | AMJ569EC |
| Toilet roll holder | 45 x 145 x 92 | AMJ067C |
| Single towel rail | 50 x 550 x 83 | AMJ06518C |
| Single towel rail | 50 x 652 x 83 | AMJ06524C |
| Single towel rail | 50 x 805 x 83 | AMJ06530C |
| Single towel rail | 50 x 645 x 90 | AMJ06924C |
| Magnetic soap holder | 50 x 40 x 65 | AMJ784C |
| Double toilet roll holder | 50 x 304 x 94 | AMJ078C |
| Corner rack | 285 x 195 x 195 | AMJAWPCS |
| Stainless steel toilet brush and holder | 380 x 84 x 84 | AMJ191C |
| Swing arm towel rail | 78 x 420 x 36 | AMJ0762C |
| Glass Shelf | 50 x 590 x 140 | AMJ06622C |
| Grab bar | 65 x 245 x 50 | AMJV1901C |
| Towel rack | 64 x 512 x 217 | AMJV1751 |
| Soap dish | 35 x 112 x 90 | AMJV1301 |

MERCURY

| | | |
|---------------------------------------|-----------------|----------|
| Frosted glass tumbler and holder | 100 x 118 x 115 | AME9005S |
| Frosted glass soap dish and holder | 48 x 118 x 115 | AME9004S |
| Toilet roll holder | 125 x 150 x 84 | AME9001S |
| Towel ring | 195 x 150 x 84 | AME9002S |
| Single towel rail | 55 x 627 x 84 | AME9006S |
| Glass shelf | 38 x 616 x 120 | AME9003S |
| Large two-tier wire rack | 324 x 408 x 140 | AME9017S |
| Double robe hook | 144 x 88 x 76 | AME9009S |
| Soap basket | 38 x 158 x 115 | AME9012S |
| Wire rack | 54 x 408 x 140 | AME9014S |
| Two-tier wire rack | 244 x 208 x 140 | AME9016S |
| Single corner basket | 46 x 275 x 220 | AME9020S |
| Two-tier corner basket | 236 x 275 x 220 | AME9022S |
| Frosted glass toilet brush and holder | 350 x 148 x 115 | AME9010S |

Shower features

Shower features

| | Temperature & Flow | Safety | Controls |
|--|---|--------|----------|
| | Thermostatic temperature control | | |
| | Temperature stabilised | | |
| | Integrated pump | | |
| | Economy flow option | | |
| | Installation set max temperature limit | | |
| | Adjustable maximum temperature stop | | |
| | Automatic shutdown | | |
| | Phased shutdown | | |
| | Low pressure warning | | |
| | Shower warm up | | |
| | Adjustable timed shutdown | | |
| | Audible alerts | | |
| | Separate flow and temperature control | | |
| | Single flow and temperature control | | |
| | Start/Stop button | | |
| | Single start/stop & power selection control | | |
| | Power on indicator | | |

DIGITAL SHOWERS

| | | | | | | | | | | | | | | | | | |
|---------------------------------------|---|---|---|---|--|---|---|---|---|---|---|--|---|--|---|--|---|
| Satellite Sirona with Metis kit | ● | | ● | ● | | ● | ● | | | ● | ● | | ● | | ● | | ● |
| Satellite Sirona with Mellena kit | ● | | ● | ● | | ● | ● | | | ● | ● | | ● | | ● | | ● |
| Satellite Sirona with Bellona kit | ● | | ● | ● | | ● | ● | | | ● | ● | | ● | | ● | | ● |
| Satellite Sirona with Carvola kit | ● | | ● | ● | | ● | ● | | | ● | ● | | ● | | ● | | ● |
| Satellite Sirona with Cyrene kit | ● | | ● | ● | | ● | ● | | | ● | ● | | ● | | ● | | ● |
| Aspirante Wireless / T300 Si Wireless | | ● | | ● | | | | ● | ● | | | | ● | | ● | | |
| Aspirante Remote / T300 Si Remote | | ● | | ● | | | | ● | ● | | | | ● | | ● | | |

ELECTRIC SHOWERS

| | | | | | | | | | | | | | | | | | |
|-----------------------|---|---|---|---|---|---|--|---|---|--|---|---|---|---|---|---|---|
| T150Z | ● | | | | ● | ● | | ● | ● | | ● | ● | | ● | ● | | ● |
| T150Z Pumped | ● | | ● | | ● | ● | | ● | ● | | ● | ● | | ● | ● | | ● |
| Aspirante | | ● | | ● | | | | ● | ● | | ● | ● | | ● | ● | | ● |
| Topaz T100si | ● | | | ● | | | | ● | ● | | | | ● | ● | ● | | ● |
| Aspirante Topaz | ● | | | ● | | | | ● | ● | | | | ● | ● | ● | | ● |
| Topaz T80si | ● | | | ● | | | | ● | ● | | | | ● | ● | ● | | ● |
| Aspirante XR | | ● | | ● | | | | ● | ● | | | | ● | ● | ● | | ● |
| T100xr | | ● | | ● | | | | ● | ● | | | | ● | ● | ● | | ● |
| T80Z Fast-Fit | | ● | | ● | | | | ● | ● | | | | ● | ● | ● | | ● |
| T80Z Thermostatic | ● | | | ● | | | | ● | ● | | | | ● | ● | ● | | ● |
| T80Z Slimline | | ● | | ● | | | | ● | ● | | | | ● | ● | ● | | ● |
| T70Z | | ● | | ● | | | | | | | | | ● | ● | | ● | ● |
| T90xr | | ● | | ● | | | | | | | | | ● | ● | | ● | ● |
| Safeguard Care | ● | | | | ● | ● | | ● | ● | | ● | ● | | ● | ● | | ● |
| Safeguard Pumped Care | ● | | ● | | ● | ● | | ● | ● | | ● | ● | | ● | ● | | ● |

MIXER SHOWERS

| | | | | | | | | | | | | | | | | | |
|--|---|--|--|--|---|---|---|--|--|--|--|--|---|---|---|--|--|
| Elina TMV3 Exposed | ● | | | | ● | | | | | | | | ● | | | | |
| Unichrome Thames Shower Pole | ● | | | | | | ● | | | | | | ● | | | | |
| Unichrome Thames Vertical Bar Mixer | ● | | | | | | ● | | | | | | ● | | | | |
| Unichrome Thames Vertical Bar Mixer Fixed Head | ● | | | | | | ● | | | | | | ● | | | | |
| Unichrome Thames Bar Diverter | ● | | | | ● | | ● | | | | | | ● | | | | |
| Unichrome Thames Dual Control | ● | | | | ● | | ● | | | | | | ● | | | | |
| Unichrome Thames Dual Control Diverter | ● | | | | ● | | ● | | | | | | ● | | | | |
| Unichrome Thames Concentric | ● | | | | ● | | ● | | | | | | ● | | | | |
| Unichrome Thames Sequential | ● | | | | ● | | ● | | | | | | | ● | | | |
| Unichrome Thames Single Lever | ● | | | | ● | | ● | | | | | | | | ● | | |
| Unichrome Thames Mini Sequential Exposed | ● | | | | ● | | ● | | | | | | | ● | | | |
| Unichrome Thames Mini Sequential Built-in | ● | | | | ● | | ● | | | | | | | ● | | | |
| Unichrome Thames Mini Concentric Exposed | ● | | | | ● | | ● | | | | | | ● | | | | |
| Unichrome Thames Mini Concentric Built-in | ● | | | | ● | | ● | | | | | | ● | | | | |
| Unichrome Mersey Mini Sequential Exposed | ● | | | | ● | | ● | | | | | | | ● | | | |
| Unichrome Mersey Mini Sequential Built-in | ● | | | | ● | | ● | | | | | | | ● | | | |
| Unichrome Mersey Sequential Exposed | ● | | | | ● | | ● | | | | | | | ● | | | |
| Unichrome Mersey Sequential Built-in | ● | | | | ● | | ● | | | | | | | ● | | | |
| Unichrome Mersey Dual Control | ● | | | | ● | | ● | | | | | | ● | | | | |
| Unichrome Mersey Concentric | ● | | | | ● | | ● | | | | | | ● | | | | |
| Unichrome Mersey Exposed Fixed Head | ● | | | | ● | | ● | | | | | | ● | | | | |
| Unichrome Mersey Built-in Fixed Head | ● | | | | ● | | ● | | | | | | ● | | | | |
| Unichrome Mersey Bar Diverter | ● | | | | ● | | ● | | | | | | ● | | | | |
| Unichrome Mersey Bar Mixer | ● | | | | ● | | ● | | | | | | ● | | | | |
| Unichrome Mersey Bar Mixer Fixed Head | ● | | | | ● | | ● | | | | | | ● | | | | |
| Unichrome Dart | ● | | | | | ● | ● | | | | | | ● | | | | |
| Unichrome Nene Cool Touch | ● | | | | | ● | ● | | | | | | ● | | | | |
| Unichrome Nene Bar Mixer with Diverter & Body Jets | ● | | | | | ● | ● | | | | | | ● | | | | |
| Unichrome Tyne | ● | | | | | ● | ● | | | | | | ● | | | | |
| Unichrome Aire | ● | | | | | ● | ● | | | | | | ● | | | | |
| Unichrome Aire Bath and Shower | ● | | | | | ● | ● | | | | | | ● | | | | |
| Unichrome Dove | ● | | | | | ● | ● | | | | | | ● | | | | |
| Unichrome Dove Bar Diverter | ● | | | | | ● | ● | | | | | | ● | | | | |
| Unichrome Avon Dual Control | ● | | | | ● | | ● | | | | | | ● | | | | |

POWER SHOWERS

| | | | | | | | | | | | | | | | | | |
|------------------------|---|--|---|--|--|---|---|--|--|--|--|--|---|--|---|--|--|
| Aspirante Power Shower | ● | | ● | | | ● | ● | | | | | | ● | | ● | | |
| AS2000XT Thermostatic | ● | | ● | | | ● | ● | | | | | | ● | | ● | | |
| AS2000X Manual | | | ● | | | ● | ● | | | | | | ● | | ● | | |

ECO SHOWERS

| | | | | | | | | | | | | | | | | | |
|------------------------|---|---|--|---|--|---|---|---|--|---|--|--|---|--|---|--|---|
| Unichrome Dart Eco | ● | | | | | ● | ● | | | | | | ● | | | | |
| Unichrome Dove Bar Eco | ● | | | | | ● | ● | | | | | | ● | | | | |
| T80Z Fast-Fit Eco | | ● | | ● | | | | | | ● | | | ● | | ● | | ● |
| T80Z Slimline Eco | | ● | | ● | | | | ● | | | | | ● | | ● | | ● |

| | Fitting | Finish | Power Rating | Guarantee | System | Accreditations |
|--|---------|--------|--------------|-----------|--------|----------------|
| Remote control | | | | | | |
| Exposed | | | | | | |
| Exposed with rigid riser rail and fixed head | | | | | | |
| Exposed with fixed head | | | | | | |
| Built-in | | | | | | |
| Built-in with fixed head | | | | | | |
| Riser rail kit | | | | | | |
| Showahead 5 spray patterns | | | | | | |
| Showahead 3 spray patterns | | | | | | |
| Showhead single spray pattern | | | | | | |
| Microphone showerhead | | | | | | |
| Body Jets | | | | | | |
| Soap dish | | | | | | |
| 2.0m Hose | | | | | | |
| 1.75m Hose | | | | | | |
| 1.25m Hose | | | | | | |
| Complementary taps (sold separately) | | | | | | |
| Riviera Sand | | | | | | |
| Gun Metal | | | | | | |
| Brushed Steel | | | | | | |
| Black Pearl | | | | | | |
| White Gloss | | | | | | |
| Black Gloss | | | | | | |
| Brushed chrome/chrome | | | | | | |
| Chrome | | | | | | |
| Satin/chrome | | | | | | |
| Aqua/chrome | | | | | | |
| White/chrome | | | | | | |
| White | | | | | | |
| 10.5 kW | | | | | | |
| 9.5 kW | | | | | | |
| 8.5 kW | | | | | | |
| 7.5 kW | | | | | | |
| 5 year | | | | | | |
| 3 year | | | | | | |
| 2 year | | | | | | |
| 1 year | | | | | | |
| High pressure | | | | | | |
| Low pressure | | | | | | |
| Cold mains | | | | | | |
| Low pressure with a pump | | | | | | |
| BEAB CARE mark | | | | | | |
| RNIB | | | | | | |
| WRAS | | | | | | |
| BEAB safety | | | | | | |
| CE | | | | | | |
| BS Kitemark | | | | | | |
| TMV3 | | | | | | |
| TMV2 | | | | | | |



The heart of every bathroom.

Triton is a division of Norcros Group (Holdings) Limited.

Triton Showers, Triton Road, Nuneaton, Warwickshire CV11 4NR

Brochure enquiries Tel: +44 (0) 24 7632 4460

Customer Service Tel: +44 (0) 844 980 0750

www.tritonshowers.com

It is our policy to improve the design and specification of our products and we reserve the right to depart from the details given without prior notice.

All tiles provided by Johnson Tiles. www.johnson-tiles.com



LITCONS01
DEC 11